




PHILIPS

CoreLine tempo large

BVP130

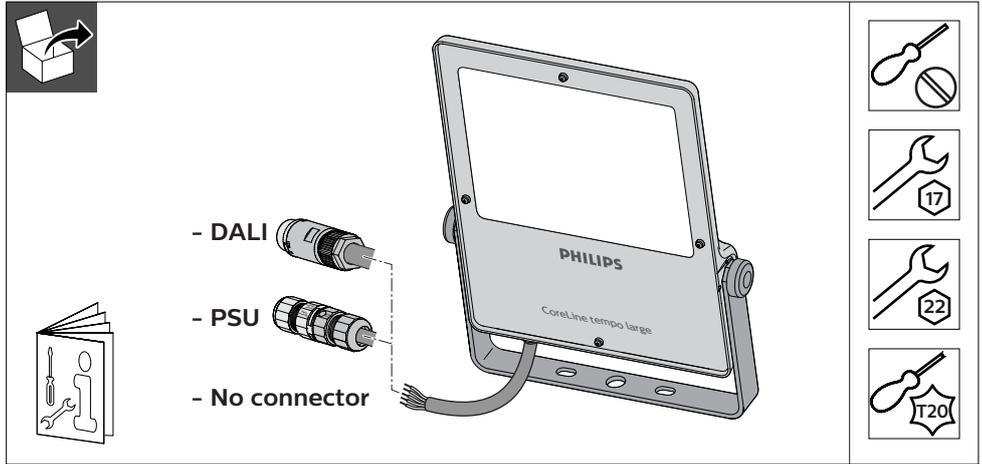


	Luminaire Flux (lm)	Power (W)	CCT	CRI	Beam	m ²	kg
BVP130 LED260-4S/740	26400	217					7.5
BVP130 LED210-4S/740	21320	162	4000	70			7.0
BVP130 LED160-4S/740	16400	120			S/OFA52	0.15	7.5
BVP130 LED216-4S/830	21600	225					7.5
BVP130 LED172-4S/830	17220	164	3000	80			7.0
BVP130 LED131-4S/830	13120	126					7.0

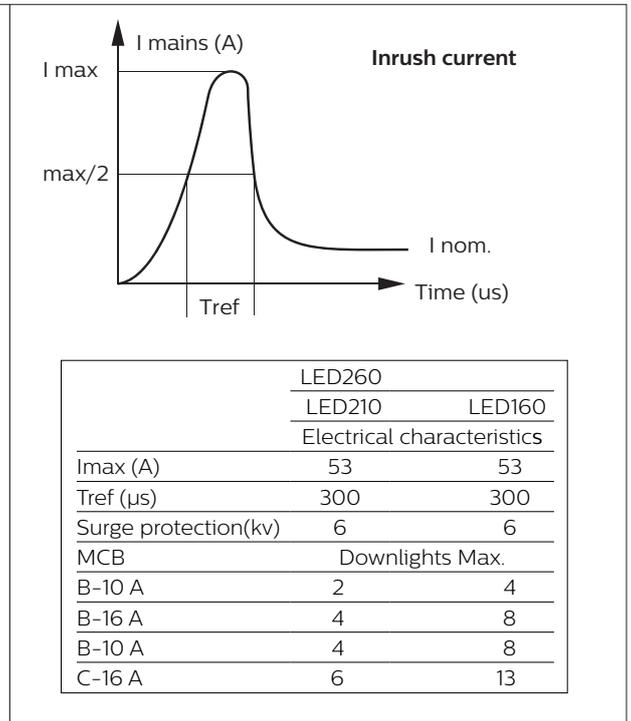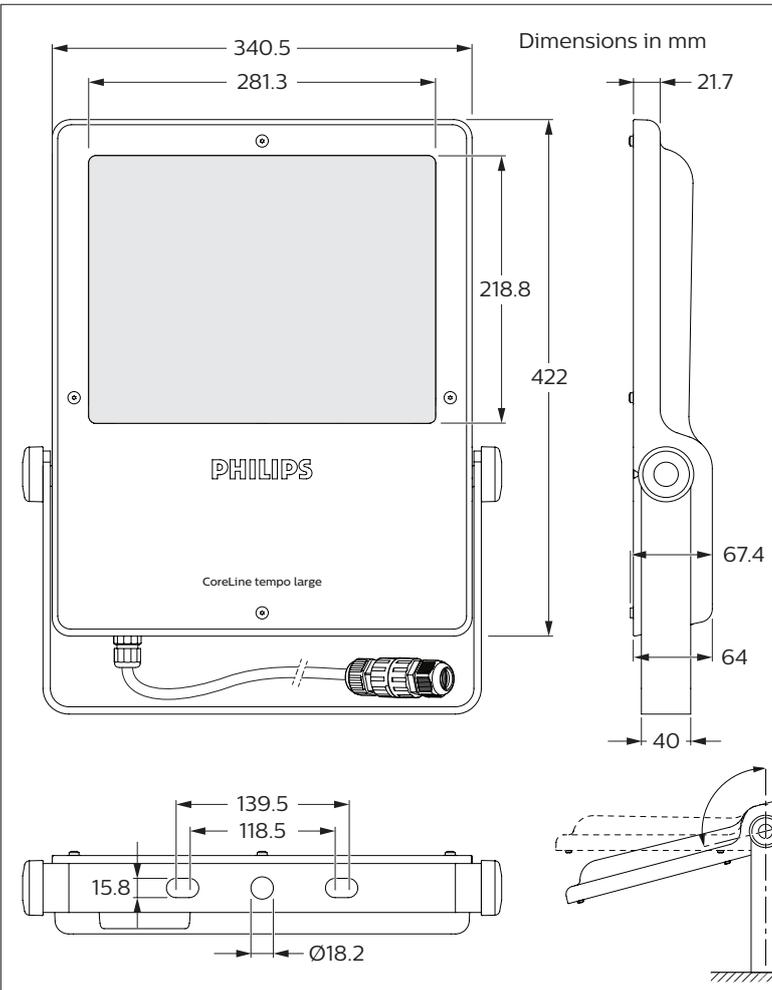




Install the luminaire according to the national regulations.

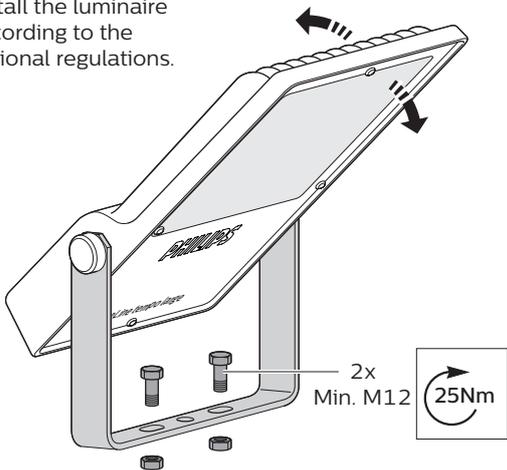


1a


In case of using only the central hole fixation and if the luminaire is higher >3 m, the use of 2nd fixing security system is mandatory.

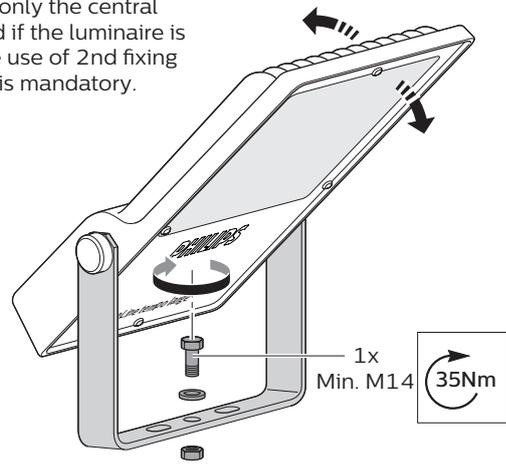


1b

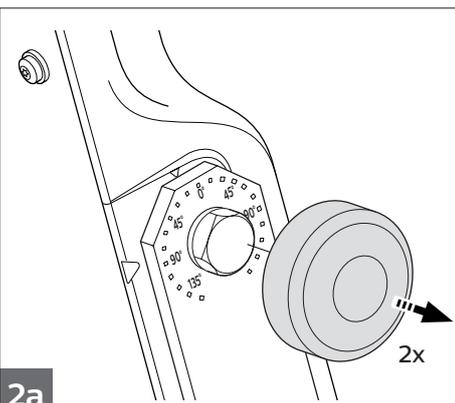


2a

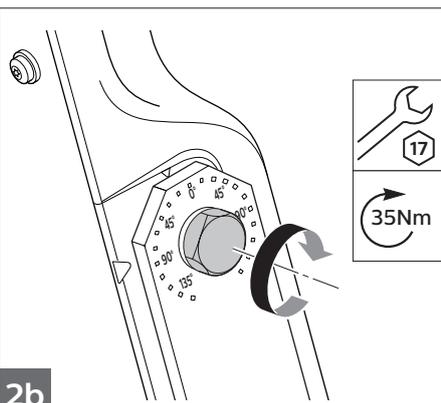


2b

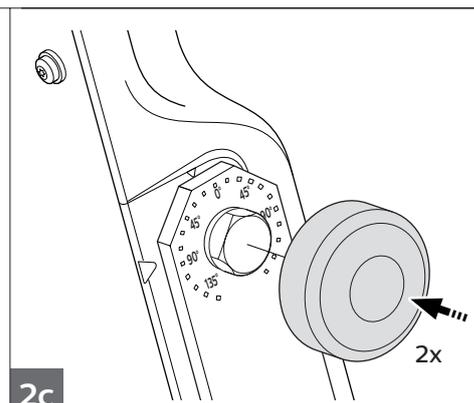


2c

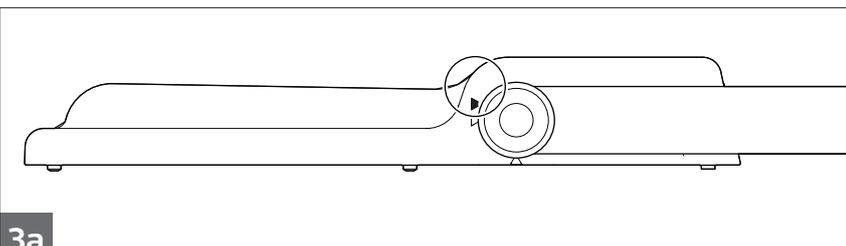


3a



PSU with 3 poles connector




Blue (N)
Yellow-Green (Ground)
Brown (L)




Min. 3x1,0 mm²
Max. 3x2,5 mm²
Ø 7-Ø 12 mm




DALI with 5 poles connector



Black (+DA)
Grey (-DA)
Yellow-Green (Ground)
Blue (N)
Brown (L)



Min. 5x0,25 mm²
Max. 5x1,50 mm²
Ø 7-Ø 12 mm

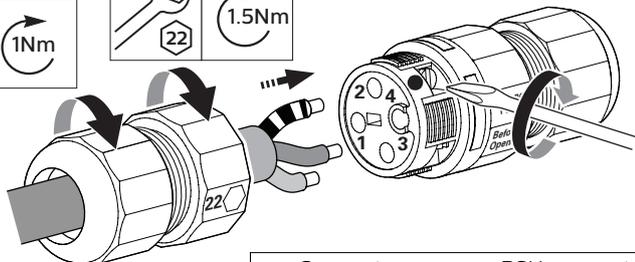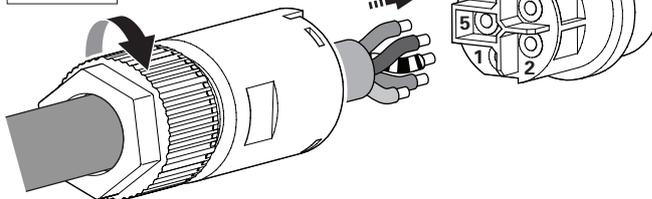

Connector position	PSU connector 3 poles	DALI connector 5 poles
1	-	N (blue)
2	L (brown)	DALI+ (black)
3	N (blue)	DALI- (grey)
4	ground (yellow/green)	L (brown)
5	-	ground (yellow/green)


3b

No connector (L brown, N blue, GRD yellow/green, DALI- grey and DALI+ black)







glass maintenance instruction.




The luminaire power should be switched off before opening.

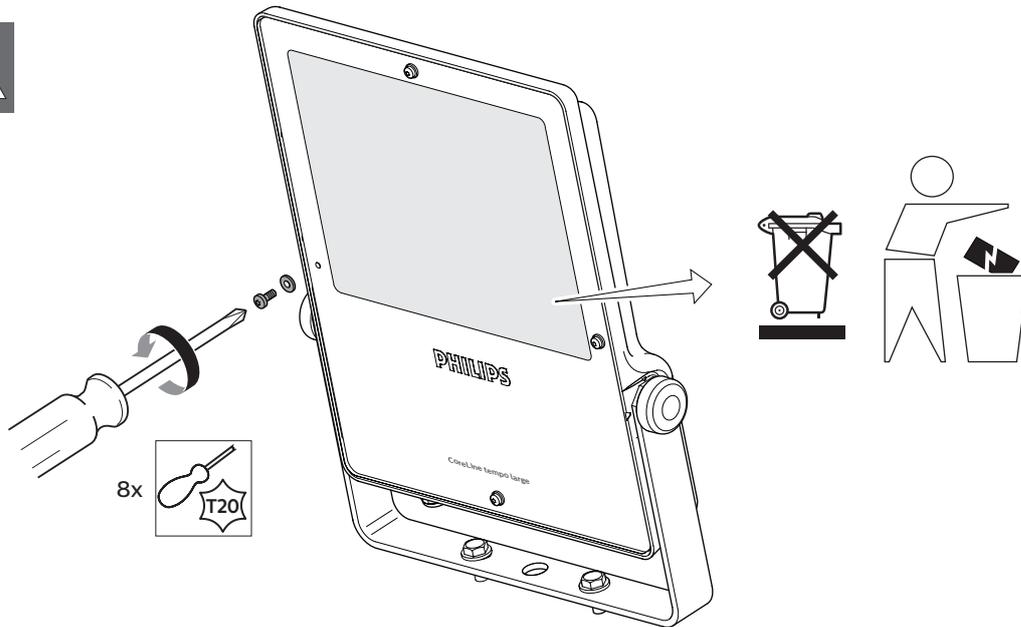


4a

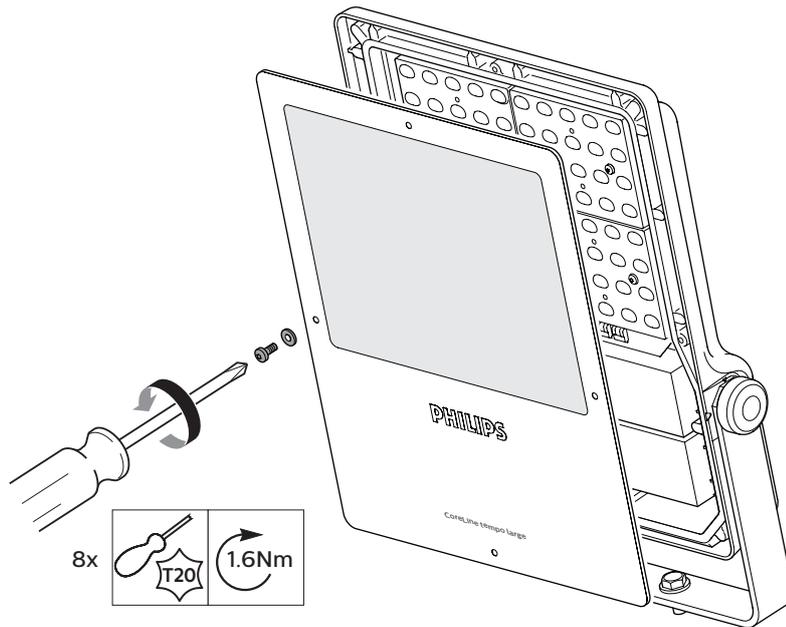

4b

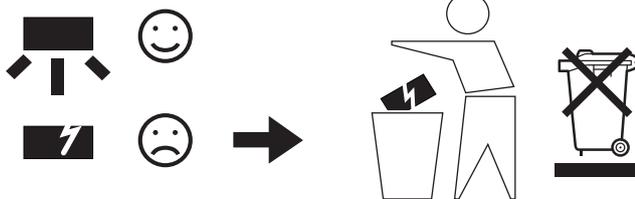

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Outdoor use only.



© 2018 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands