

EAN: 6414150079559

www.oras.com/en/products/oras/product/2729F



Kitchen faucet with easy-grip levers for hot and cold water, touchless function, temperature display with hot water warning, flexible high swivel spout, aerator and smart dishwasher valve. The flow-rate of hot and cold water is adjusted by separate levers. Spout's swing angle is factory preset at 120° (can be limited to 60° or 80°). The touchless function is turned on by taking hands within the recognition range. The water temperature for the touchless function is adjusted by turning the ring between the faucet and the spout. Touchless function can be easily switched on/off. The dishwasher valve is opened by pressing a switch with signal light, and the valve closes automatically after preset period. Dishwasher valve closes automatically after 4 or 12 hours (one push opens the valve for 4 hours, pushing for 5 seconds opens the valve for 12 hours). Electrical connection with a plug transformer 230/5 V. The faucet is equipped with litter filters.

F = with flexible pipes

- Kitchen
- Two-grip, Touchless, Hybrid, Plug-in transformer
- Deck mounted
- Chrome
- Swivel spout
- electronic utility shut-off valve
- Easy-Grip Lever
- integrated diverter with automatic reset
- Pull-out hand spray
- Litter filter(s)
- Signal lights
- body made of DZR brass, surfaces in contact with drinking water contain less than 0.3% lead, waterways without nickel coating

Technical data

Flow properties

Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	300 kPa

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	200 mm
Material	brass

Software settings


Dishwasher valve open period	4 h / 12 h
Max. flow period	40 s (10/40/60/120/180 s)



Electronic properties

Electrical Connection	230 / 5 V
-----------------------	------------------


Regulations

EMC Directive	CE 2014/30/EU
EN standard	EN 15091
Noise class	I (ISO 3822) Oras lab.
Protection class	IP 54 / transformer IP 40

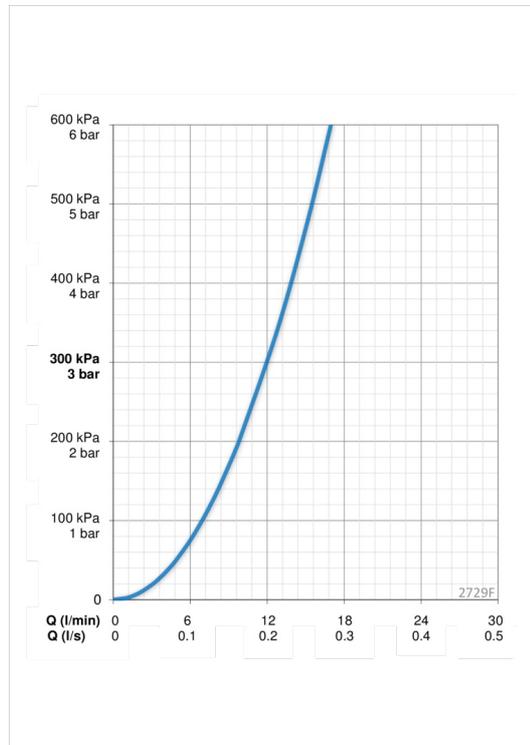

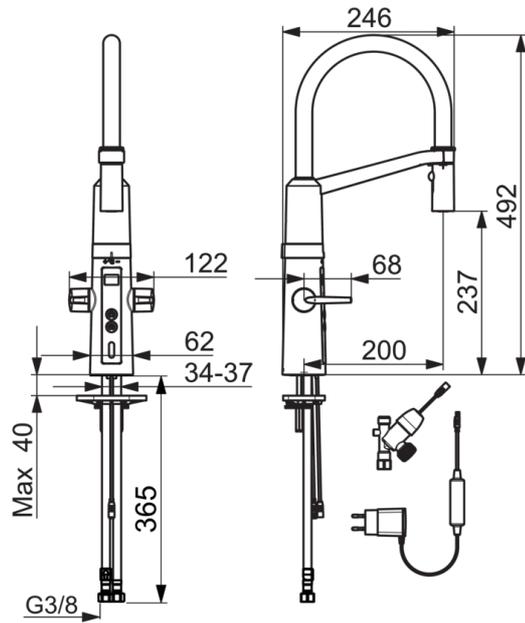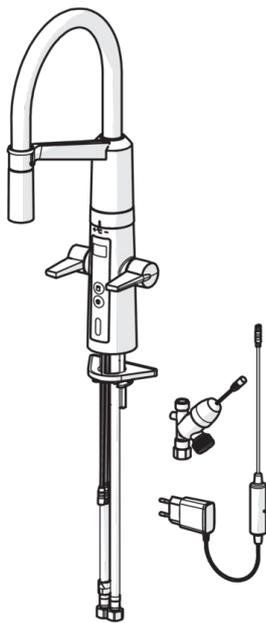

Spare parts

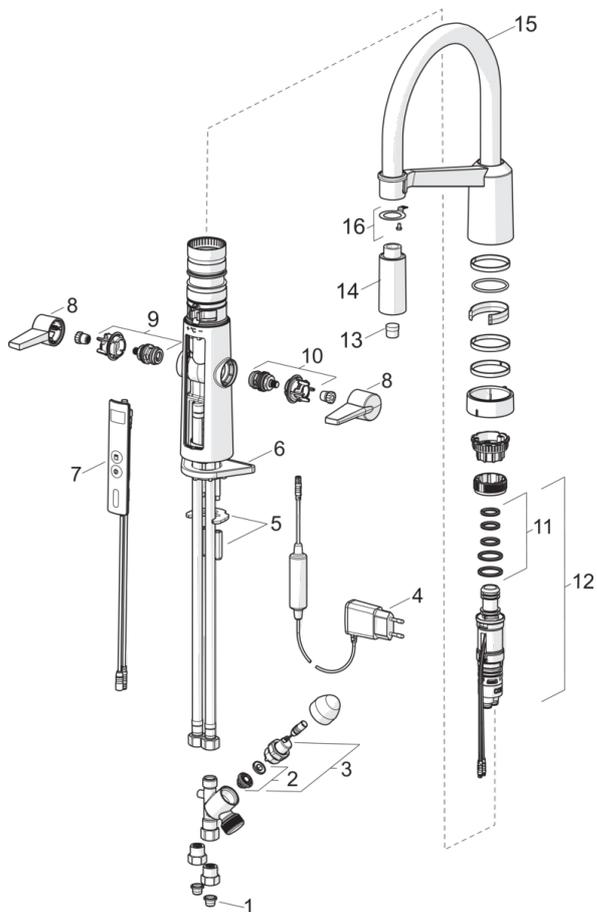

SP2729F

	Code
01	199257/2
02	601512V
03	601307V
04	601472V
05	158697
06	158825
07	601223V
08	601094/2
09	601092V
10	601091V
11	601072V
12	1003246V
13	1000972V
14	1001321V
15	1002660V
16	1001323V