

EAN: 6414150082375

www.oras.com/en/products/oras/product/3002F



High washbasin faucet with fixed spout, aerator and Bidetta hand shower, shower hose and wall bracket.

F = with flexible pipes

- Bathroom
- Single lever, Bidetta
- Deck mounted
- Chrome
- PCA® for a constant flow rate regardless of pressure fluctuations, HONEYCOMB® with improved lime protection, CACHE®, without housing directly screwed into the faucet spout
- Bidetta hand shower

Technical data

Flow properties


Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	100 kPa


Technical properties

Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	150 mm
Material	brass

Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

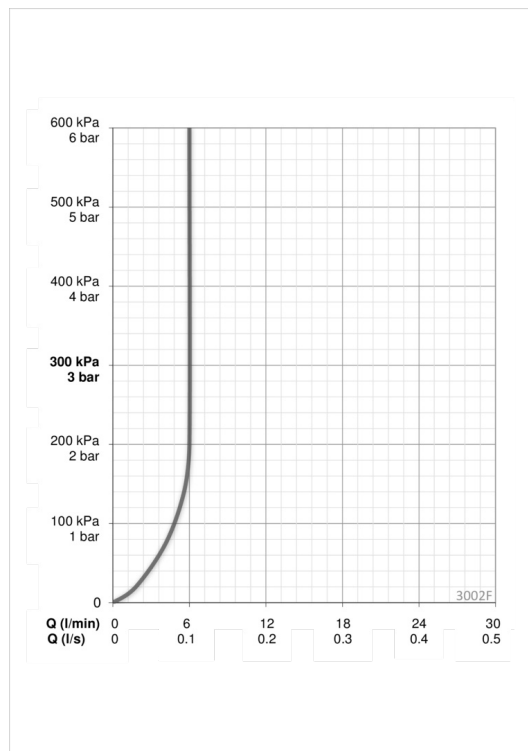

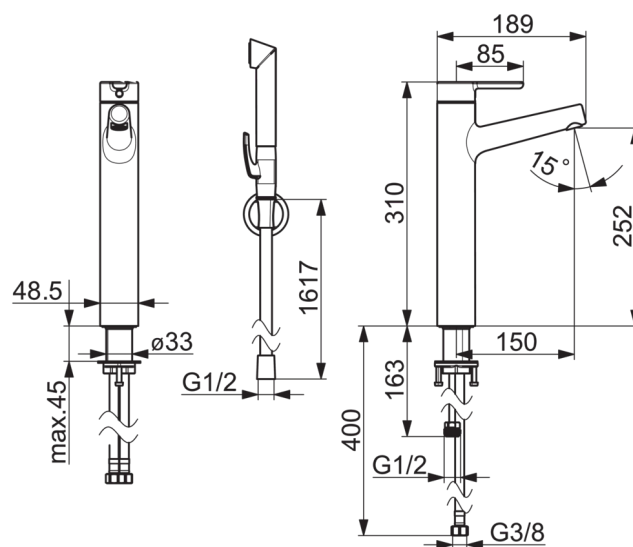

This exploded view diagram illustrates the components of a kitchen faucet assembly. The parts are numbered as follows:

- 1**: Lever handle with a curved grip.
- 2**: A small screw used to secure the handle.
- 3**: A circular cap or seal for the handle base.
- 4**: A decorative ring or trim piece.
- 5**: The main faucet cartridge or stem assembly.
- 6** and **7**: Two small O-rings or seals for the spout.
- 8**: The main faucet body or spout.
- 9**: A mounting bracket or base plate for the faucet.
- 10**: The main faucet stem or riser pipe.
- 11**: A collection of components for the faucet base, including a large black cap, a small screw, and two small O-rings.

	Code
01	1003074V
02	1002323V
03	1001740V
04	158726
05	158890
06	1001722V
07	602671V
08	602684V
09	602629V
10	602206/2
11	159684