

EAN: 6414150082429

www.oras.com/en/products/oras/product/3008F



Washbasin faucet with Bidetta hand shower and swivel spout. Spout's swing angle is factory preset at 120° (can be limited to 0° or 60°). Shower hose 1.6 m and wall bracket. There are also in-built limitation options for water temperature and maximum flow-rate.

F= with flexible pipes

- Bathroom
- Single lever, Side operated, Bidetta
- Deck mounted
- Chrome
- PCA® for a constant flow rate regardless of pressure fluctuations, HONEYCOMB® with improved lime protection, CACHE®, without housing directly screwed into the faucet spout
- Bidetta hand shower
- 3S-installation system for safe and simple mounting

Technical data

Flow properties


Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	100 kPa


Technical properties

Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	150 mm
Material	brass


Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

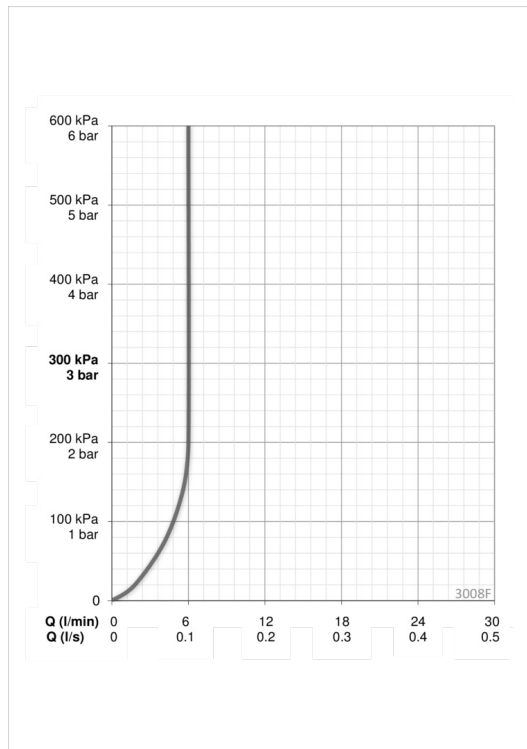

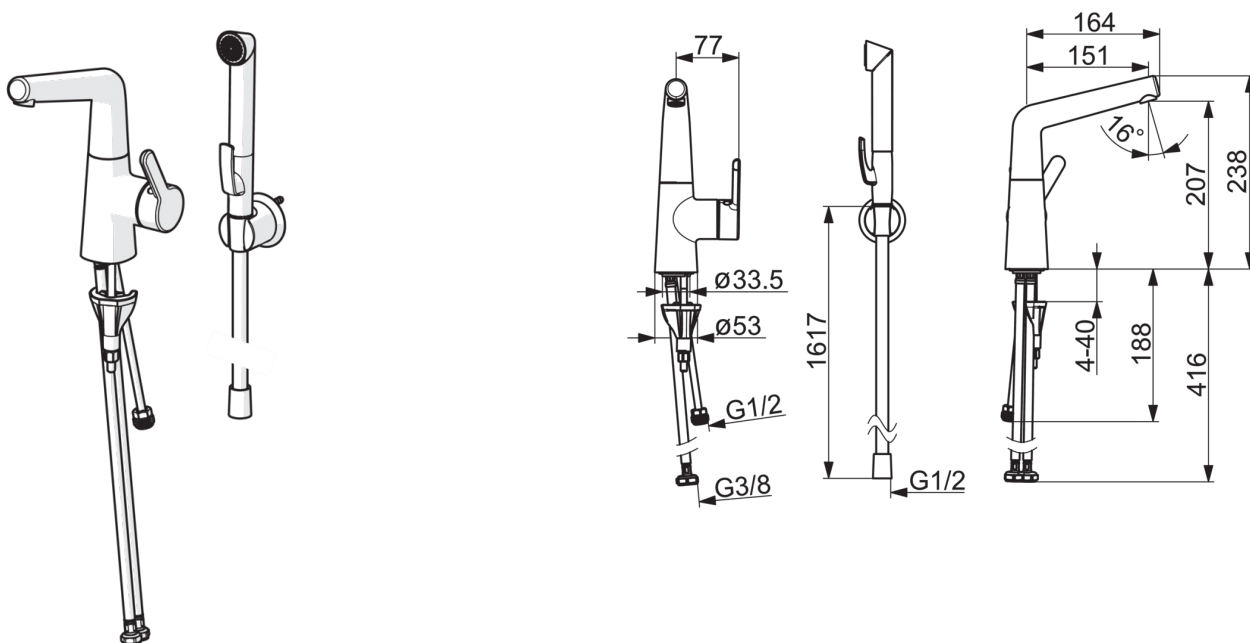

Spare parts

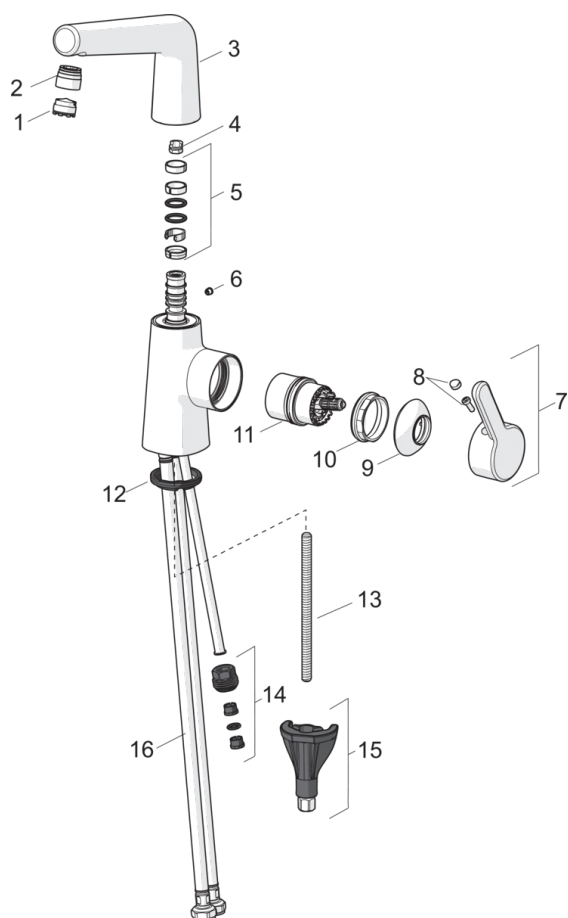

SP3004F

	Code
01	602671V
02	1001722V
02	1005427V-34
03	1002464V
03	1005433V-34
04	159670/10
04	159667V
05	159499
06	1005428V-34
06	602685V
07	1003084V
07	1005431V-34
08	1002323V
09	1001740V
09	1005432V-34
10	158726
11	1003691V
12	1002371V
13	1000780V
14	159684
15	602610V
16	1004656V