



LIGHTWEIGHT CONCRETE PLUG


Mounting

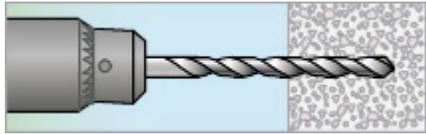

1. Drill hole. According to Technical data below.

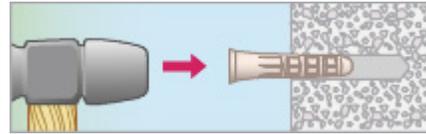

2. Knock in the Lightweight concrete plug with the help of a hammer in the lightweight concrete. Knock the plug in until it is flush with the surface of the substrate.

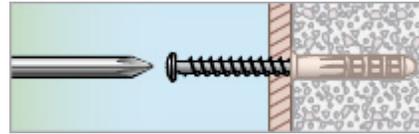

3. Install the object using an appropriate screw, according to Technical data below.

Technical data

Dimension x length mm	Min. drill depth mm	Drill diameter mm	Screw Ø mm
10x55	60	10	6
12x60	65	12	8
14x75	80	14	10