




1. Drill the hole according to Technical data below. Be careful not to damage the drywall on the back and around the exit hole.

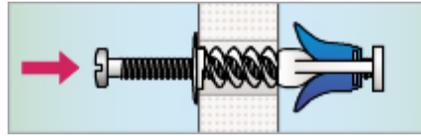

2. Press the Duo-Max through the board with help of the screw.

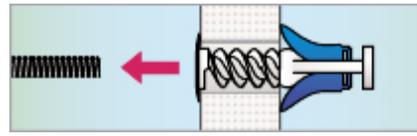

3. Pull the screw carefully and check that the wings have gripped at the rear. Unscrew the screw.

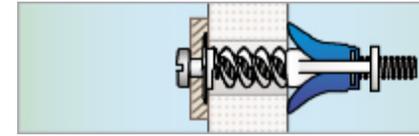

4. Mount the object. The installation is finished.

Technical data

Dimension	Single drywall 13mm	Double drywall 26 mm
	Tension load (N) / Shear load (V) kg	Tension load (N) / Shear load (V) kg
TSP 10	14 / 36	36 / 40

Screw \varnothing x length	Drill diameter	Screw head	Fixture thickness drywall 13mm	Fixture thickness drywall 26mm
mm	mm \varnothing	mm \varnothing	mm	mm
M5 x 50 (TSP 10)	10	10	12	-
M5 x 75 (TSP 10)	10	10	37	24
M5 x 75 (TSP 10 Hook)	10	11	35	22

