



# NYLON PLUG


## Mounting

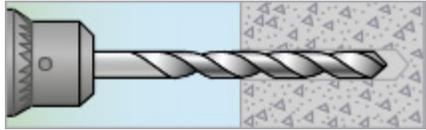

1. Drill hole according to tabel below.

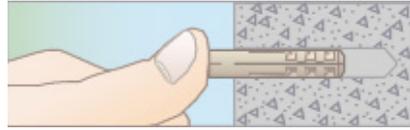

2. Push the plug into the hole.



3. Mount the detail using an appropriate screw. The screw must go through the plug by about 3-5mm.



4. The installation is finished.

## PRACTICAL LOAD CAPACITY

Designation	Screw $\varnothing$ mm	Drill $\varnothing$	Drill depth min. mm	Concrete C20/25 Tension load/ Shear load kg	Lightweight concrete Quality group 450 Tension load kg
N4×20	3	4	30	20	-
N5×25	4	5	35	30/65	4
N6×30	5	6	40	50/90	8
N8×40	6	8	50	80/110	15
N10×50	8	10	60	120/220	20
N12×60	10	12	70	180/340	25
NL8×65	6	8	75	-	20
NL10×80	8	10	90	-	25
NL12×95	10	12	105	-	35
N14×70	12	14	80	280	35
N16×80	14	16	90	400	50
N20×90	16	20	100	550	65

*Safety factor for tension and shear load = 6.0 with the largest screw diameter per dimension*