
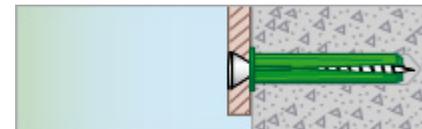
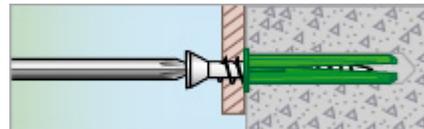


# SCREW WITH PLASTIC PLUG

## Mounting

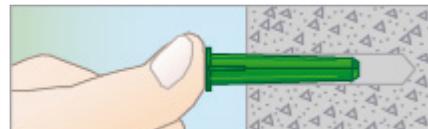

1. Drill the hole according to Technical data below.

2. Press the plug into the hole.

3. Place the object in position and drive in the screw.

4. The installation is finished.

|                     | Drill diameter | Min. drill depth | Screw diameter |
|---------------------|----------------|------------------|----------------|
|                     | Ø mm           | mm               | Ø mm           |
| Plastic plug white  | 5,5            | 20               | 3-5            |
| Plastic plug yellow | 5,5            | 25               | 4-5            |
| Plastic plug red    | 5,5            | 40               | 4-5            |
| Plastic plug brown  | 8              | 45               | 5-6            |
| Plastic plug blue   | 10             | 50               | 6-8            |
| Plastic plug green  | 12             | 65               | 8-10           |
| Plastic plug grey   | 14             | 78               | 10-12          |

*Important! the length of the screw should be 3-9mm longer than the plug.*

|                     | Concrete C20/25<br>Tension load/Shear load<br>kg | Brick<br>Tension load/Shear load<br>kg |
|---------------------|--|--|
| Plastic plug white  | 15 / 40  | 15 / 30                                |
| Plastic plug yellow | 25 / 50  | 20 / 40                                |
| Plastic plug red    | 40 / 60  | 30 / 50                                |
| Plastic plug brown  | 80 / 120   | 40 / 70                                |
| Plastic plug blue   | 100 / 140  | -                                      |
| Plastic plug green  | 200 / 300  | -                                      |
| Plastic plug grey   | 250 / 400  | -                                      |

*Security factor: Tension load=6,0 och shear load = 4,5*