
ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
* ************************************	Battery: Li-lon cell 18650 (3'000 mAh - Q5xrs defend)	951.025	52 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049911215
	Bike holder	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491
	Traffic Cone Orange	950.081	50 g	L: 18.0 cm, W: 4.5 cm, H: 4.5 cm	5704049907256
	Traffic Cone Yellow	950.087	50 g	L: 18.0 cm, W: 4.5 cm, H: 4.5 cm	5704049907485
0	Anti-Roll ring (fluorescent orange)	950.105	8 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049912502

SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon holster for SUPRABEAM Q5xrs defend	995.0160	5704049905979
	Switch complete for SUPRABEAM Q5xrs defend	995.0120	5704049907324
	Replacement Lense for Q5xrs defend, complete	995.0125	5704049907379
	Wall charging station - USB-C	995.0157	5704049911680

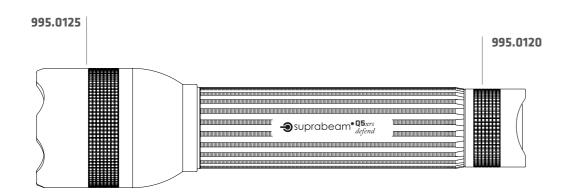


Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Suprabeam A/S Dyssen 3 DK-8200 Aarhus N. Denmark

Phone: +45 87 525 212 www.suprabeam.com info@suprabeam.com

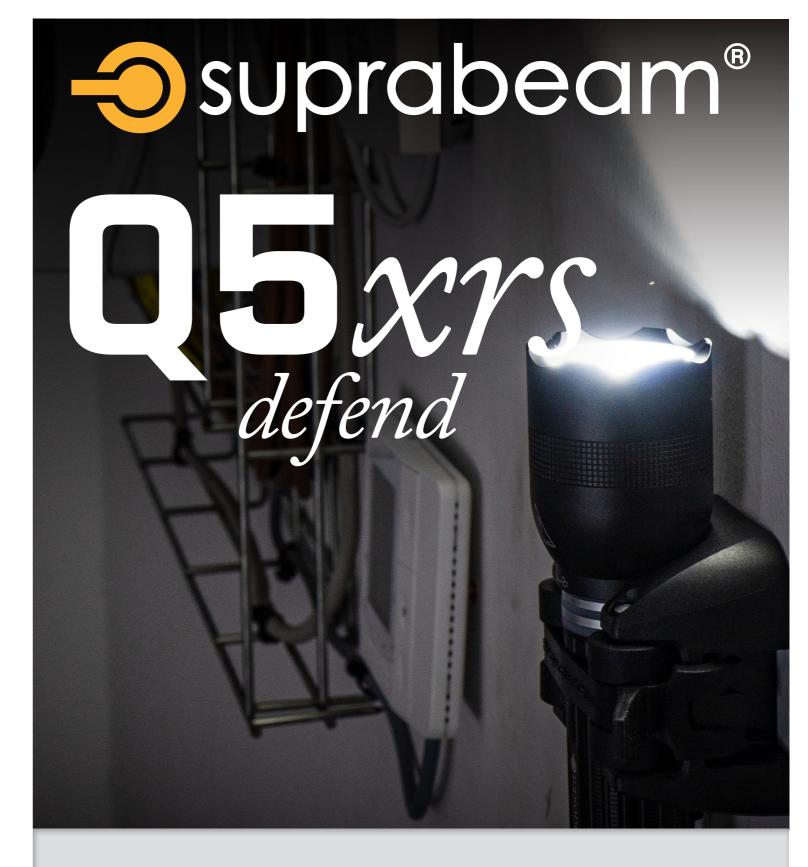













KEY FEATURES / UNIQUE SELLING POINTS (USP)



SMART INTERNAL CHARGING

The USB-C connected charger for the Q5xrs defend is designed to be mounted hanging on a wall or installed in a vehicle, making it effortless to hang in your Q5xrs defend for



ROTATING HOLSTER

The new Q5xrs defend features a 360-degree rotating holster with a clip designed specifically for MOLLE mounting slots. This smart holster allows you to operate your Q5xrs defend hands-free, pointing it in any direction to light up your environment effortlessly.



EMERGENCY LIGHT FUNCTION

When released from the charger or during a power outage, the Q5xrs defend will switch on immediately, providing instant illumination. This amazing feature ensures that you are never left in the dark.



HIGH CAPACITY BATTERY

The battery inside the Q5xrs defend is a high capacity 18650 Li-ion cell with 3000 mAh of capacity. The large battery capacity is essential as the battery is charged inside the torch, and therefore it is able to power the light for a long time before it needs recharging.



SLIDING HYPERFOCUS™


The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding




TACTICAL FRONT AND BACK

Use the strike bezel for self-defense or as an easy way to locate your torch in the dark. When switched on and placed upside down on a table, it will light up around the tip of the head. The tactical tail cap is carefully shaped so that it can be used to break light surfaces. You will also be able to use it for selfdefense.

LIGHT CURVE AND RUNTIMES

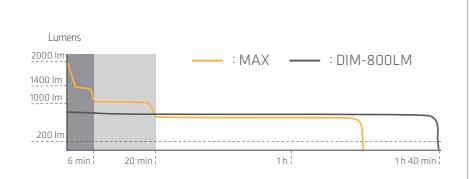



WHAT'S IN THE BOX



































BATTERY MANUAL

DIMENSIONS



www.suprabeam.com

PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Recyclable Cardboard Packaging
Single Box Content / Size / Weight:	1 pcs, height/width/depth: 19 x 19 x 5 cm / 472 g
Master Box Content / Size / Weight:	5 pcs, height/width/depth: 22 x 28 x 21 cm / 2.6 kg
Part. No.:	505.7111
EAN-CODE:	5704049911482

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Black
Switch at Rear:	Electronic Switch with Solid Silicone Buttor
Dimensions:	L: 161 mm, ø: 39 mm
Weight incl. Battery:	182 <u>s</u>
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°

ELECTRONICS

Built in Controller:	Yes, DIM and STEP mode
Standard Power Source:	Li-ion 18650 (3000 mAh
Charging Time:	80% = 2 h, 100% = 3 h 40 mir
Beam / Distance:	Variable from Spot to Floodlight / 360 Meter
Luminous Flux:	Max: 2000 lm / Medium: 400 lm / Low: 50 lm / Dimming: 800 - 6 lm / Strobe 10 H
Lighting Time:	Max: 1 h 15 min / Medium: 3 h 30 min / Low: 28 h / Dimming: 1h 30 min - 118
Accessories Included:	Holster, Strap, Anti-Roll Ring, USB-C Cable, Wall Charge
Charging Temperature:	-0°C to +45°