

Technical Datasheet

Welding rods Hot welding for vinyl floorings

WELDING RODS

DESCRIPTION

4 mm welding rods joining floorcovering for perfect hygiene, watertightness and seam strength.

Key features:

- Hot welding for perfect watertightness and hygiene.
- Superior seam strength.
- Available in unicolor and multi-colour versions (depending on ranges).
- Designed to match perfectly the flooring colour.
- Multicolour welding rods for HO rolls for invisible welding.
- Easy to clean and maintain.

Compatible flooring:

- Homogeneous vinyls (compact and acoustic)
- Heterogeneous vinyls (compact et acoustic)

Main segments of application:



TECHNICAL INFORMATION

Product

Size (mm) 1 bobbin of 50lm
(diameter 4mm)

Bobbin weight (kg) 1.0

Packaging


Min. order 1 bobbin

INSTALLATION

- Floorcovering must be welded 24h after the installation.
- Groove the floorcovering to create a gap between both products with 2/3 thickness for compact, till foam for acoustic.
- Weld the product with an average speed of 2lm/min and a 350-400°C temperature.
- rim the overflow of the joint material first with a «Quarter moon knife»
- Trim the joint material with the «Mozart» a second time

CLEANING & MAINTENANCE

Cf. flooring cleaning instructions.

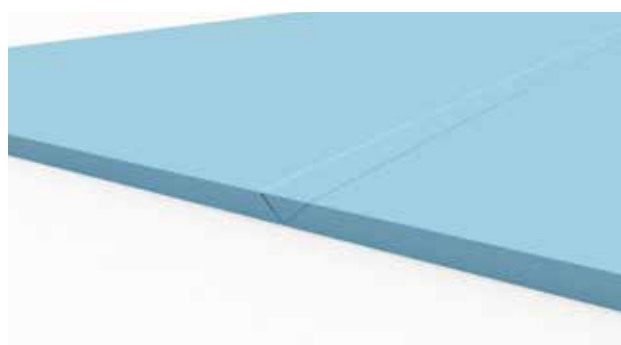

ARTICLE CODE

Available for every HO and HE vinyl floorings. Please refer to product sample book or to <http://professionals.tarkett.com> to find the right reference.

	Uni welding rods	Multi-colour welding rods
	1287 ---	1290 --- (except 011 > 018)
	1288 ---	1439 ---
	1289 ---	26760 ---
	1290 011 > 1290 018	26761 ---
	1291 ---	26762 ---
	1292 ---	
	1294 ---	
	24806 ---	
iQ Natural	1296 ---	1297 ---