







Paslode®

PSN50NP



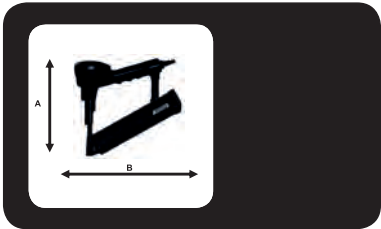

PSN50NP

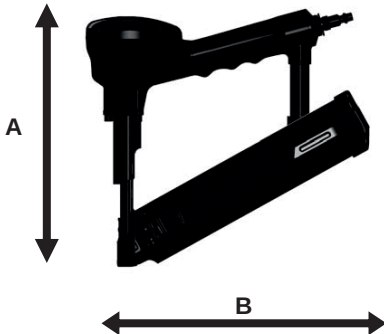				A = 254 mm B = 277 mm C = 112 mm	
				 = 1,88 kg	
 		 EN 12549+EN ISO 4871		L_{WA.1s} = 100,9 dBA L_{pA.1s} = dBA L_{pA.1s1m} = 87,9 dBA	
3,31l (7 bar)/  Ps max. = 8 bar		EN12096 : 1997  ISO 8662-11		Vibration = 4,5 m/s²	
 20 x				Diameter d = 4,3-4,6 mm Length L = 40-50 mm Angle A = 34°	
Paslode 34° Strip Nails					



+



=



Model: PSN50NP

No. 505688

Paslode
PSN50 NP
 PNEUMATIC 34° STRIP NAILER FOR PLASTIC
 COLLATERAL ANCHOR NAILS
 Code: 505688



Diameter $d = 4.3 - 4.6 \text{ mm}$
 Length $L = 40 \text{ and } 50 \text{ mm}$
 Angle $\alpha = 34^\circ$



7500 Befestigungssysteme GmbH,
 Carl-Neubauer-Str. 10, 30289 Hannover, Germany



No. 014748 + No. 505928


No. 014121

Accessories










No. 151299 / No. 576216

0,5 l oil / 1 l oil



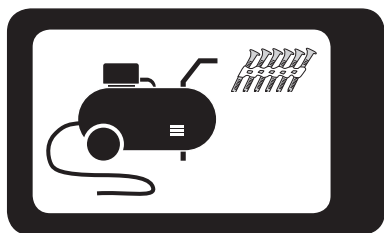





014 748

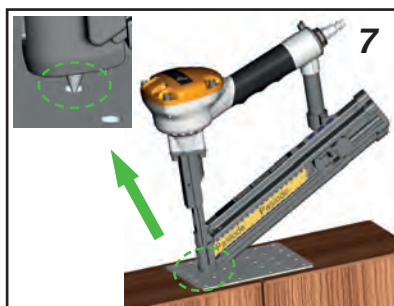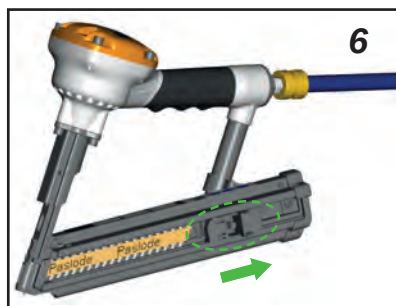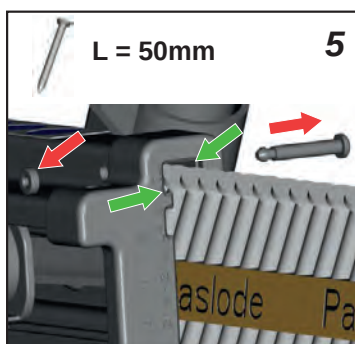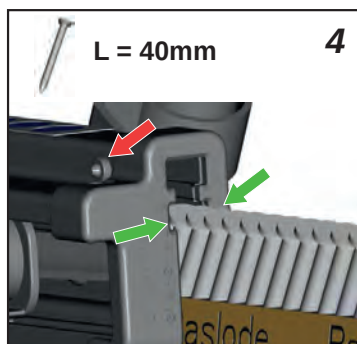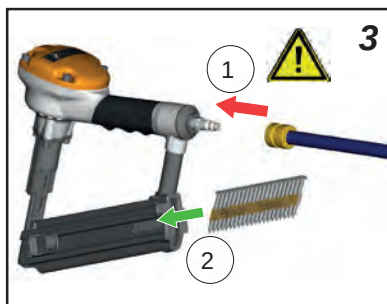



014 748



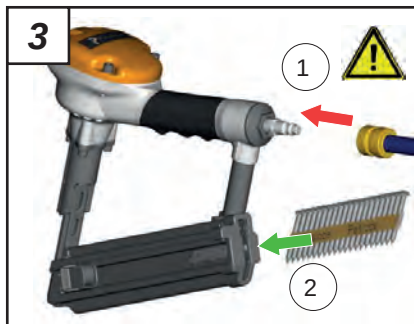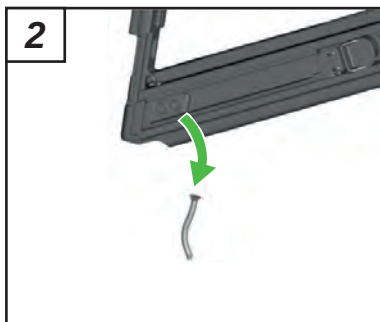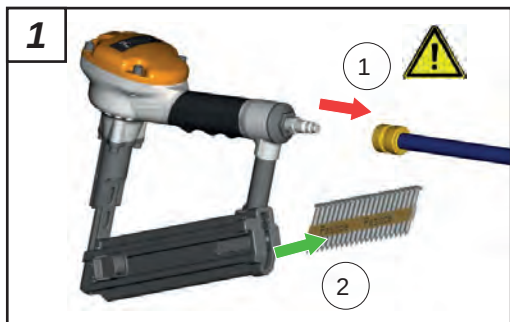



YY/WW....

YY= Year of manufacture
WW = Week of manufacture

**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokoiová poloha/ Položaj mirovanja/ وضع السكون / Ramybės
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**



NOTES :





ITW CONSTRUCTION PRODUCTS EUROPE
Code 505928 (05/2019)
www.spitpaslode.com