






Paslode®

CNP65.1



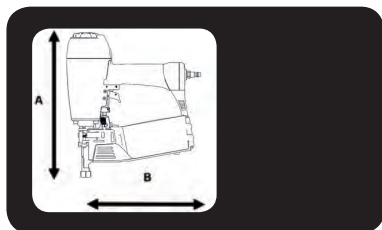

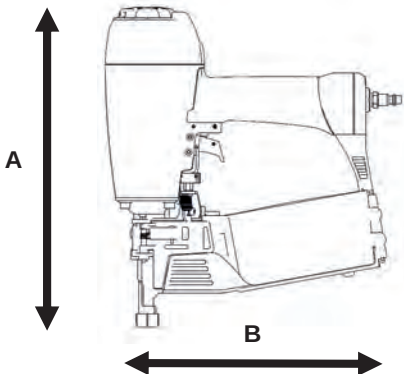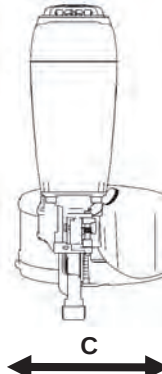		A = 320 mm B = 310 mm C = 160 mm
		 = 2,2 kg

1,7l (6 bar) /
Ps max. = 8,3 bar

EN 12549+EN ISO 4871	L_{WA.1s} = 89 dBA L_{pA.1s} = 86 dBA L_{pA.1s1m} = 76 dBA
EN12096 : 1997 ISO 8662-11	Vibration = 2,8 m/s²

325 x		
Paslode 0° Coil Nails	Paslode IN-tape	D max. = 5,8 mm L = 35-65 mm d = 2,1-3,0 mm




	Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvenciālās palaides iedarbināšana Raðkveikjuvirkjun
	Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funcionamento a contacto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaattimetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní spoušť/ Sorozatlövés (folyamatosan behűtött elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaides iedarbināšana/ Snertikveikjuvirkjun




Model: CNP65.1 No. 505706 	Model: CNP65.1 No. 505707 				
CNP65.1 PNEUMATIC COIL NAILER Code: 505706 Trigger actuation: Sequential 100 Jahre 1913-2013 Carl Paslode AG - 15 - 30356 Hennigsdorf, Germany Ø 1" COIL  IN-TAPE  Ø max = 5,2 mm L = 250 mm Ø 1/2" x 3/16" x 1" Max.  	CNP65.1 PNEUMATIC COIL NAILER Code: 505707 Trigger actuation: Contact 100 Jahre 1913-2013 Carl Paslode AG - 15 - 30356 Hennigsdorf, Germany Ø 1" COIL  IN-TAPE  Ø max = 5,2 mm L = 250 mm 4 x 1/2" x 3/16" x 1" Max.  				
  No. 575641					
					 3x
No. 014748 + No. 576672	No. 617062	No. 014121			

Accessories

		
No. 576487 Hanger	No. 505203 Magazine insert	No. 151299 / No. 576216 0,5 l oil / 1 l oil


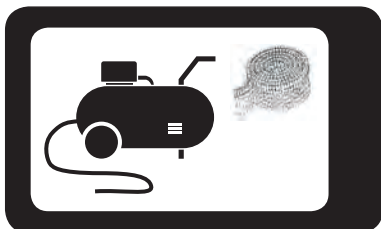




014 748

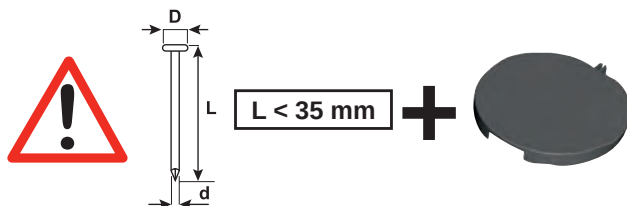
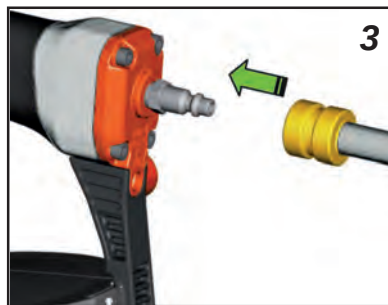





014 748

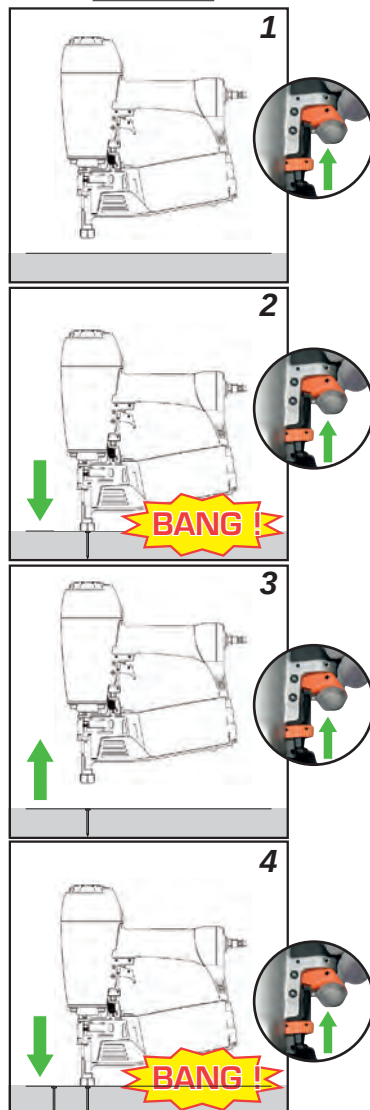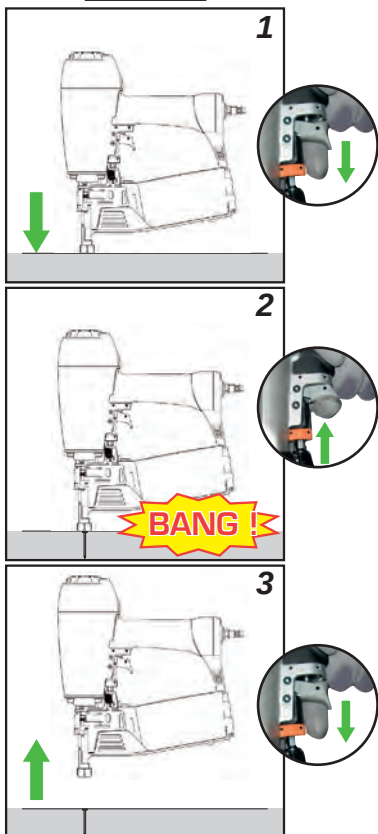

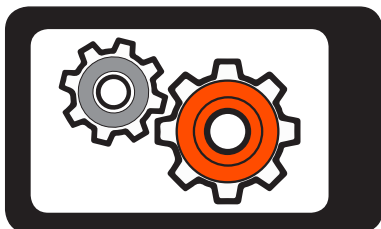

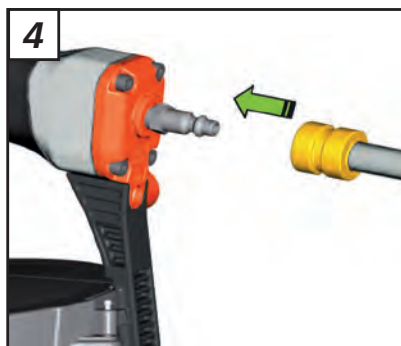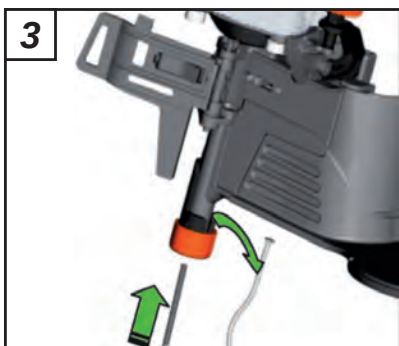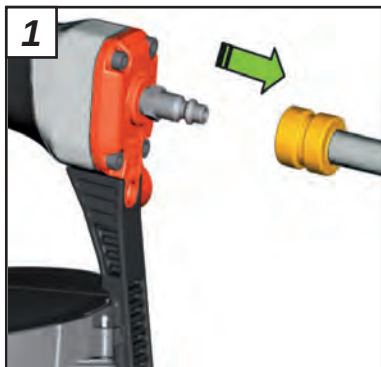

YY/WW....



YY= Year of manufacture
WW = Week of manufacture

**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokoiová poloha/ Položaj mirovanja/ وضع السكون / Ramybės
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**





ITW CONSTRUCTION PRODUCTS EUROPE
Code 576672 (04/2019)
www.spitpaslode.com