



## Declaration of Performance



11.2.2021

**Document No.:** 22627-00633-001


**Item No.:** 502222627  
**Description.:** Collated drywall screw, zinc plated  
**Diameter:** 3,5 mm  
**Length:** 40 mm  
**Thread:** Fine thread  
**Head:** Double bugle  
**Point:** Self drilling  
**Intended use:** Plasterboard to steel  
**Material:** Carbon steel C1022  
**Cert No.:** J-02003-20  
**Report No.:** 32-10433/JZ

### Declaration of essential characteristics

| Essential characteristics       | Performance                                                | Harmonised technical specification |
|---------------------------------|------------------------------------------------------------|------------------------------------|
| Reaction to fire                | A1                                                         | EN 13501-1+A1: 2010                |
| Flexural strength               | Pass                                                       | EN 14566:2008+A1:2009              |
| Release of dangerous substances | Pass                                                       | EN 14566:2008+A1:2009              |
| Protective treatment            | Above 48 hours. Service class 1                            | EN ISO 9227                        |
| Withdrawing Force               | Minimum value of 450N                                      | EN 14566:2008+A1:2009              |
| Hardness                        | Minimum case depth 0.05mm,<br>Minimum case hardness HRC 55 | EN 14566:2008+A1:2009              |

### The manufacturer declares for:

The product is in accordance with EN 14566:2008+A1:2009 "Mechanical fasteners for gypsum plasterboard systems. Definitions, requirements and test methods."

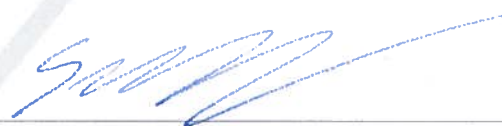

---

Simon Vanttinen, Category Manager

KESKO CORPORATION  
PO BOX 1, HELSINKI  
FI-00016 KESKO

BUSINESS ID FI0109862-8  
DOMICILE HELSINKI

TELEPHONE +358 10 53 11  
WWW.KESKO.FI