




Concrete screw anchor for use in cracked and non-cracked concrete

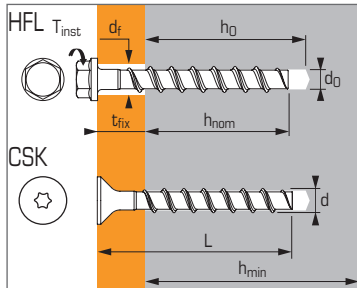

Technical data

Versions	Anchor size	Minimum embedment depth				Maximum embedment depth				Thread Ø	Drilling Ø	Total anchor length	Tighten torque	Code
		Embed. depth min.	Max. thick. of part to be fixed	Drilling depth	Min. thick. of base material	Embed. depth max.	Max. thick. of part to be fixed	Drilling depth	Min. thick. of base material					
		(mm) h _{nom}	(mm) t _{fix}	(mm) h ₀	(mm) h _{min}	(mm) h _{nom}	(mm) t _{fix}	(mm) h ₀	(mm) h _{min}	(mm) d	(mm) d ₀	(mm) L	(Nm) T _{inst}	

Zinc coated versions

HFL	8X50/5		5			-	-	-	-			50		058733
	8X60/15		15			-	-	-	-			60		058734
	8X70/25-5		25			65	5	75	120			70		058735
	8X80/35-15	45	35	55	100	65	15	75	120	10,6	8	80	20	058736
	8X100/55-35		55			65	35	75	120			100		058737
	8X120/75-55		75			65	55	75	120			120		058738
	8X140/95-75		95			65	75	75	120			140		058739
	10X60/5		5			-	-	-	-			60		058740
10X70/15		15			-	-	-	-			70		058741	
10X90/35-5		35			85	5	95	130			90		058742	
10X100/45-15	55	45	65	100	85	15	95	130	12,6	10	100	40	058743	
10X120/65-35		65			85	35	95	130			120		058744	
10X140/85-55		85			85	55	95	130			140		058745	
10X160/105-75		105			85	75	95	130			160		058746	
CSK	12X80/15	65	15	75	120	-	-	-	-	14,6	12	80	60	058747
	12X110/45-10		45			100	10	110	150			110	60	058748
	14X130/55-15	75	55	85	130	115	15	125	170	16,6	14	130	80	058768
	14X150/75-35		75			115	35	125	170			150	80	058769
CSK	8X80/35-15	45	35	55	100	65	15	75	120	10,6	8	80	20	058778

Stainless steel A4 versions

HFL	8X70/25-5	45	25	55	100	65	5	75	120	10,6	8	70	20	058809
	8X80/35-15		35				15					80		058810
	10X90/35-5		35				5					90		058811
	10X100/45-15	55	45	65	100	85	15	95	130	12,6	10	100	40	058812
	10X120/65-35		65				35					120		058813
CSK	8X80/35-15	45	35	55	100	65	15	75	120	10,6	8	80	20	058814
	10X90/35-5	55	35	65	100	85	5	95	130	12,6	10	90	40	058815

APPLICATION

- Channel, cable tray
- Brackets
- E-Clips, cowhorn
- TRH clip, rod hanging
- Trunking
- Push-pull bars
- Formwork / shuttering

MATERIAL


Zinc coated steel versions:

Min. tensile strength: 700 N/mm²
Min. zinc coated steel 5 µm

Stainless steel versions:

Min. tensile strength: 700 N/mm²
Stainless steel A4

INSTALLATION

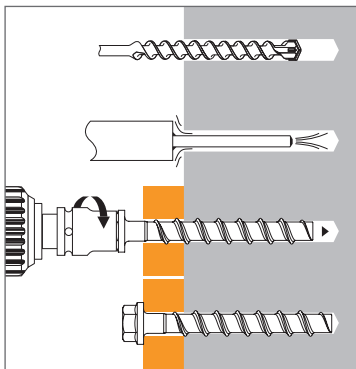

Anchor mechanical properties

Anchor size		Ø8	Ø10	Ø12	Ø14
Zinc coated & A4					
A_s (mm ²)	Stressed cross-section	39,6	65,0	97,7	134,0
W_{el} (mm ³)	Elastic section modulus	35,1	74,0	134,0	220,0
M⁰_{rk,s} (Nm)	Characteristic bending moment	26,0	56,0	113,0	185,0
M (Nm)	Recommended bending moment	13,0	28,0	56,5	92,5



The loads specified on this page allow judging the product's performances, but cannot be used for the designing. The data given in the pages "CC method" have to be applied (3/5 to 5/5).

Characteristic loads (N_{Rk} , V_{Rk}) in kN

Mean Ultimate loads are derived from test results in admissible service conditions, and characteristic loads are statistically determined.

TENSILE

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{Rk}	4,0	7,5	12,0	16,0	22,3
$h_{nom,max}$	55	65	85	100	115
N_{Rk}	9,0	16,0	25,0	36,1	44,6
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{Rk}	2,0	5,0	9,0	12,0	15,9
$h_{nom,max}$	55	65	85	100	115
N_{Rk}	4,0	12,0	20,2	25,8	31,8

SHEAR

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Cracked & non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
V_{Rk}	7,0	13,5	22,5	33,5	56,0
$h_{nom,max}$	55	65	85	100	115
V_{Rk}	7,0	17,0	34,0	42,0	56,0

Design loads (N_{Rd} , V_{Rd}) for one anchor without edge or spacing influence in kN

$$N_{Rd} = \frac{N_{Rk}^*}{\gamma_{Mc}} \quad *Derived from test results$$

$$V_{Rd} = \frac{V_{Rk}^*}{\gamma_{Ms}}$$

TENSILE

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{Rd}	2,6	5,0	8,0	10,7	14,9
$h_{nom,max}$	55	65	85	100	115
N_{Rd}	6,0	10,7	16,7	24,1	29,7
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{Rd}	1,3	3,3	6,0	8,0	10,6
$h_{nom,max}$	55	65	85	100	115
N_{Rd}	2,6	8,0	13,5	17,2	21,2

$\gamma_{Mc} = 1,5$

SHEAR

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Cracked & non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
V_{Rd}	5,6	10,8	18,0	26,8	44,8
$h_{nom,max}$	55	65	85	100	115
V_{Rd}	5,6	13,6	27,2	33,6	44,8

$\gamma_{Ms} = 1,25$

Recommended loads (N_{rec} , V_{rec}) for one anchor without edge or spacing influence in kN

$$N_{rec} = \frac{N_{Rk}^*}{\gamma_M \cdot \gamma_F} \quad *Derived from test results$$

$$V_{rec} = \frac{V_{Rk}^*}{\gamma_M \cdot \gamma_F}$$

TENSILE

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{rec}	1,8	3,6	5,7	7,6	10,6
$h_{nom,max}$	55	65	85	100	115
N_{rec}	4,3	7,6	11,9	17,2	21,2
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
N_{rec}	0,9	2,4	4,3	5,7	7,6
$h_{nom,max}$	55	65	85	100	115
N_{rec}	1,85	5,7	9,6	12,3	15,1

$\gamma_F = 1,4$; $\gamma_{Mc} = 1,5$

SHEAR

Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Cracked & non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
V_{rec}	4,0	7,7	12,9	19,1	32,0
$h_{nom,max}$	55	65	85	100	115
V_{rec}	4,0	9,7	19,4	24,0	32,0


$\gamma_F = 1,4$; $\gamma_{Ms} = 1,25$

⁽¹⁾ TAPCON Ø6 range, see references concerned page 64



SPIT CC Method

TENSILE in kN




→ Pull-out resistance

$$N_{Rd,p} = N^0_{Rd,p} \cdot f_b$$

$N^0_{Rd,p}$	Design pull-out resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$N^0_{Rd,p}$	2,7	5,0	8,0	10,7	-
$h_{nom,max}$	55	65	85	100	115
$N^0_{Rd,p}$	6,0	10,7	16,7	-	-
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$N^0_{Rd,p}$	1,3	3,3	6,0	8,0	-
$h_{nom,max}$	55	65	85	100	115
$N^0_{Rd,p}$	2,7	8,0	-	-	-

$\gamma_{Mc} = 1,5$




→ Concrete cone resistance

$$N_{Rd,c} = N^0_{Rd,c} \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$N^0_{Rd,c}$	Design cone resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$N^0_{Rd,c}$	5,8	7,0	9,5	11,9	14,9
$h_{nom,max}$	55	65	85	100	115
$N^0_{Rd,c}$	9,8	12,6	18,9	24,1	29,7
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$N^0_{Rd,c}$	4,1	5,0	6,8	8,5	10,6
$h_{nom,max}$	55	65	85	100	115
$N^0_{Rd,c}$	7,0	9,0	13,5	17,2	21,2

$\gamma_{Mc} = 1,5$



→ Steel resistance

$N_{Rd,s}$	Steel design tensile resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
$N_{Rd,s}$	9,3	18,0	30,0	44,7	62,7


$\gamma_{Ms} = 1,5$

⁽¹⁾ TAPCON Ø6 range, see references concerned page 64

$$N_{Rd} = \min(N_{Rd,p}; N_{Rd,c}; N_{Rd,s})$$

$$\beta_N = N_{Sd} / N_{Rd} \leq 1$$

SHEAR in kN




→ Concrete edge resistance

$$V_{Rd,c} = V^0_{Rd,c} \cdot f_b \cdot f_{\beta,V} \cdot \Psi_{S-C,V}$$

$V^0_{Rd,c}$	Design concrete edge resistance at minimum edge distance (C_{min})				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
C_{min}	40	40	50	50	50
S_{min}	40	40	50	50	50
$V^0_{Rd,c, non-cracked}$	3,0	3,2	4,6	4,9	5,1
$V^0_{Rd,c, cracked}$	2,1	2,3	3,3	3,4	3,6
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
C_{min}	40	50	50	70	70
S_{min}	40	50	50	70	70
$V^0_{Rd,c, non-cracked}$	3,2	4,6	5,0	8,3	8,8
$V^0_{Rd,c, cracked}$	2,2	3,3	3,6	5,9	6,2

$\gamma_{Mc} = 1,5$




→ Pryout failure

$$V_{Rd,cp} = V^0_{Rd,cp} \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$V^0_{Rd,cp}$	Design pryout resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$V^0_{Rd,cp}$	5,8	7,0	9,5	11,9	14,9
$h_{nom,max}$	55	65	85	100	115
$V^0_{Rd,cp}$	9,8	12,6	37,8	48,2	59,4
Cracked concrete (C20/25)					
$h_{nom,min}$	40	45	55	65	75
$V^0_{Rd,cp}$	4,1	5,0	6,8	8,5	10,6
$h_{nom,max}$	55	65	85	100	115
$V^0_{Rd,cp}$	7,0	9,0	26,9	34,3	42,4

$\gamma_{Mc} = 1,5$



→ Steel resistance

$V_{Rd,s}$	Steel design shear resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
$h_{nom,min}$	40	45	55	65	75
$V_{Rd,s}$	5,6	10,8	18,0	26,8	44,8
$h_{nom,max}$	55	65	85	100	115
$V_{Rd,s}$	5,6	13,6	27,2	33,6	44,8

$\gamma_{Ms} = 1,25$

$$V_{Rd} = \min(V_{Rd,c}; V_{Rd,cp}; V_{Rd,s})$$

$$\beta_V = V_{Sd} / V_{Rd} \leq 1$$


$$\beta_N + \beta_V \leq 1,2$$

f_b INFLUENCE OF CONCRETE

Concrete class	f_b	Concrete class	f_b
C25/30	1,1	C40/50	1,41
C30/37	1,22	C45/55	1,48
C35/45	1,34	C50/60	1,55

$f_{\beta,V}$ INFLUENCE OF SHEAR LOADING DIRECTION


Angle β [°]	$f_{\beta,V}$
0 to 55	1
60	1,1
70	1,2
80	1,5
90 to 180	2





SPIT CC Method

Ψ_s INFLUENCE OF SPACING FOR CONCRETE CONE RESISTANCE IN TENSILE LOAD



$$\Psi_s = 0,5 + \frac{s}{6 \cdot h_{ef}}$$

$$s_{min} < s < s_{cr,N}$$


$$s_{cr,N} = 3 \cdot h_{ef}$$

Ψ_s must be used for each spacing influenced the anchors group.

SPACING S	Reduction factor Ψ_s Minimum anchor depth				
	Anchor size Ø6	Ø8	Ø10	Ø12	Ø14
40	0,72	0,69			
50	0,77	0,74	0,69	0,67	0,64
70	0,88	0,83	0,77	0,73	0,70
95	1,00	0,95	0,87	0,82	0,77
105		1,00	0,91	0,85	0,80
115			0,95	0,88	0,83
130			1,00	0,93	0,87
150				1,00	0,93
175					1,00

SPACING S	Reduction factor Ψ_s Minimum anchor depth				
	Anchor size Ø6	Ø8	Ø10	Ø12	Ø14
40	0,65				
50	0,69	0,66	0,62		
70	0,77	0,72	0,67	0,65	0,63
100	0,88	0,82	0,75	0,71	0,68
130	1,00	0,92	0,82	0,77	0,74
155		1,00	0,88	0,82	0,78
200			1,00	0,92	0,86
240				1,00	0,93
275					1,00

$\Psi_{c,N}$ INFLUENCE OF EDGE FOR CONCRETE CONE RESISTANCE IN TENSILE LOAD



$$\Psi_{c,N} = 0,27 + 0,48 \cdot \frac{c}{h_{ef}}$$

$$c_{min} < c < c_{cr,N}$$


$$c_{cr,N} = 1,5 \cdot h_{ef}$$

$\Psi_{c,N}$ must be used for each distance influenced the anchors group.


EDGE C	Reduction factor $\Psi_{c,N}$ Minimum anchor depth				
	Anchor size Ø6	Ø8	Ø10	Ø12	Ø14
40	0,89				
45	0,97				
50	1,00	0,96	0,83	0,75	0,68
55		1,00	0,88	0,80	0,73
60			0,94	0,85	0,77
65			1,00	0,89	0,81
75				1,00	0,89
90					1,00

EDGE C	Reduction factor $\Psi_{c,N}$ Minimum anchor depth				
	Anchor size Ø6	Ø8	Ø10	Ø12	Ø14
40	0,71				
50	0,82	0,73	0,62		
65	1,00	0,87	0,73		
70		0,92	0,76	0,69	0,64
80		1,00	0,83	0,75	0,69
100			1,00	0,87	0,79
120				1,00	0,90
140					1,00


$\Psi_{s-c,V}$ INFLUENCE OF SPACING AND EDGE DISTANCE FOR CONCRETE EDGE RESISTANCE IN SHEAR LOAD



$$\Psi_{s-c,V} = \frac{c}{c_{min}} \cdot \sqrt{\frac{c}{c_{min}}}$$



$$\Psi_{s-c,V} = \frac{3 \cdot c + s}{6 \cdot c_{min}} \cdot \sqrt{\frac{c}{c_{min}}}$$

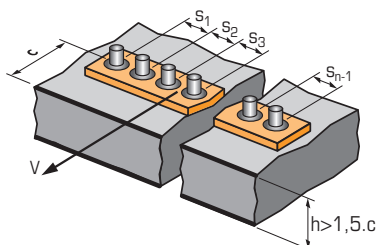

For single anchor fastening

$\frac{c}{c_{min}}$	Reduction factor $\Psi_{s-c,V}$ Cracked & non-cracked concrete											
	1,0	1,2	1,4	1,6	1,8	2,0	2,2	2,4	2,6	2,8	3,0	3,2
$\Psi_{s-c,V}$	1,00	1,31	1,66	2,02	2,41	2,83	3,26	3,72	4,19	4,69	5,20	5,72

For 2 anchors fastening

$\frac{s}{c_{min}}$	Reduction factor $\Psi_{s-c,V}$ Cracked & non-cracked concrete												
	$\frac{c}{c_{min}}$	1,0	1,2	1,4	1,6	1,8	2,0	2,2	2,4	2,6	2,8	3,0	3,2
1,0	0,67	0,84	1,03	1,22	1,43	1,65	1,88	2,12	2,36	2,62	2,89	3,16	
1,5	0,75	0,93	1,12	1,33	1,54	1,77	2,00	2,25	2,50	2,76	3,03	3,31	
2,0	0,83	1,02	1,22	1,43	1,65	1,89	2,12	2,38	2,63	2,90	3,18	3,46	
2,5	0,92	1,11	1,32	1,54	1,77	2,00	2,25	2,50	2,77	3,04	3,32	3,61	
3,0	1,00	1,20	1,42	1,64	1,88	2,12	2,37	2,63	2,90	3,18	3,46	3,76	
3,5		1,30	1,52	1,75	1,99	2,24	2,50	2,76	3,04	3,32	3,61	3,91	
4,0			1,62	1,86	2,10	2,36	2,62	2,89	3,17	3,46	3,75	4,05	
4,5				1,96	2,21	2,47	2,74	3,02	3,31	3,60	3,90	4,20	
5,0					2,33	2,59	2,87	3,15	3,44	3,74	4,04	4,35	
5,5						2,71	2,99	3,28	3,71	4,02	4,33	4,65	
6,0							2,83	3,11	3,41	3,71	4,02	4,33	4,65


For 3 anchors fastening and more

$$\Psi_{s-c,V} = \frac{3 \cdot c + s_1 + s_2 + s_3 + \dots + s_{n-1}}{3 \cdot n \cdot c_{min}} \cdot \sqrt{\frac{c}{c_{min}}}$$



SPIT CC Method (values issued from ETA - Seismic category C1)

TENSILE in kN




→ Pull-out resistance

$$N_{Rd,p} = N_{Rd,p}^0 \cdot f_b$$

$N_{Rd,p,C1/C2}^0$	Design pull-out resistance						
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø6 ⁽¹⁾	Ø8	Ø10	Ø10	Ø12	Ø14
Category C1 & C2 - Single anchor							
h_{nom}	40	55	65	55	85	100	115
$N_{Rd,p,C1}^0$	1,3	2,7	8,0	6,0	-	-	-
$N_{Rd,p,C2}^0$	NA	NA	1,6	NA	3,6	4,7	7,0
Category C1 & C2 - Group of anchors ⁽²⁾							
h_{nom}	40	55	65	55	85	100	115
$N_{Rd,p,C1}^0$	1,1	2,3	6,8	5,1	-	-	-
$N_{Rd,p,C2}^0$	NA	NA	1,4	NA	3,1	4,0	6,0

⁽²⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Mc} = 1,5$




→ Concrete cone resistance

$$N_{Rd,c} = N_{Rd,c}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$N_{Rd,c,C1/C2}^0$	Design cone resistance						
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø6 ⁽¹⁾	Ø8	Ø10	Ø10	Ø12	Ø14
Category C1 & C2 - Single anchor							
h_{nom}	40	55	65	55	85	100	115
$N_{Rd,c,C1}^0$	3,5	6,0	7,6	5,8	11,4	14,6	18,0
$N_{Rd,c,C2}^0$	NA	NA	7,6	NA	11,4	14,6	18,0
Category C1 & C2 - Group of anchors ⁽²⁾							
h_{nom}	40	55	65	55	85	100	115
$N_{Rd,c,C1}^0$	3,1	5,3	6,7	5,1	10,1	12,9	15,9
$N_{Rd,c,C2}^0$	NA	NA	6,7	NA	10,1	12,9	15,9

⁽²⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Mc} = 1,5$



→ Steel resistance

$N_{Rd,s,C1/C2}$	Steel design tensile resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
$N_{Rd,s,C1}$	9,3	18,0	30,0	44,7	62,7
$N_{Rd,s,C2}$	NA	18,0	30,0	44,7	62,7


⁽²⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Ms} = 1,5$

⁽¹⁾ TAPCON Ø6 range, see references concerned page 64

$$N_{Rd} = \min(N_{Rd,p}; N_{Rd,c}; N_{Rd,s})$$

$$\beta_N = N_{Sd} / N_{Rd} \leq 1$$

SHEAR in kN




→ Concrete edge resistance

$$V_{Rd,c} = V_{Rd,c}^0 \cdot f_b \cdot f_{\beta,V} \cdot \Psi_{S-C,V}$$

$V_{Rd,c,C1/C2}^0$	Design concrete edge resistance at minimum edge distance (C_{min})						
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø6 ⁽¹⁾	Ø8	Ø10	Ø10	Ø12	Ø14
Category C1 & C2 - Single anchor							
h_{nom}	40	55	65	55	85	100	115
C_{min}	40	40	50	50	50	70	70
S_{min}	40	40	50	50	50	70	70
$V_{Rd,c,C1/C2}^0$	2,1	2,2	2,3	3,3	3,2	3,3	3,3

$V_{Rd,c,C1/C2}^0$	Design concrete edge resistance at minimum edge distance (C_{min})						
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø6 ⁽¹⁾	Ø8	Ø10	Ø10	Ø12	Ø14
Category C1 & C2 - Group of anchors ⁽²⁾							
h_{nom}	40	55	65	55	85	100	115
C_{min}	40	40	50	50	50	70	70
S_{min}	40	40	50	50	50	70	70
$V_{Rd,c,C1/C2}^0$	1,8	1,9	1,9	2,8	2,7	2,8	2,8

⁽²⁾ when more than one anchor of the group is submitted to shear load
 $\gamma_{Mc} = 1,5$




→ Pryout failure

$$V_{Rd,cp} = V_{Rd,cp}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$V_{Rd,cp,C1/C2}^0$	Design pryout resistance						
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø6 ⁽¹⁾	Ø8	Ø10	Ø10	Ø12	Ø14
Category C1 & C2 - Single anchor							
h_{nom}	40	55	65	55	85	100	115
$V_{Rd,cp,C1}^0$	3,5	6,0	15,3	11,6	22,9	29,2	36,0
$V_{Rd,cp,C2}^0$	NA	NA	15,3	NA	22,9	29,2	36,0
Category C1 & C2 - Group of anchors ⁽²⁾							
h_{nom}	40	55	65	55	85	100	115
$V_{Rd,cp,C1}^0$	3,1	5,3	13,4	10,2	20,2	25,8	31,8
$V_{Rd,cp,C2}^0$	NA	NA	13,4	NA	22,9	29,2	36,0

⁽²⁾ when more than one anchor of the group is submitted to shear load
 $\gamma_{Mc} = 1,5$



→ Steel resistance ⁽³⁾

⁽³⁾ In case of no hole clearance between anchor and fixture

$V_{Rd,s,C1/C2}$	Steel design shear resistance				
Anchor size Zinc coated & A4	Ø6 ⁽¹⁾	Ø8	Ø10	Ø12	Ø14
Category C1 & C2 - Single anchor					
$V_{Rd,s,C1}$	3,8	6,8	12,2	16,8	17,9
$V_{Rd,s,C2}$	NA	7,9	14,8	25,3	32,6
Category C1 & C2 - Group of anchors ⁽²⁾					
$V_{Rd,s,C1}$	3,2	5,8	10,4	14,3	15,2
$V_{Rd,s,C2}$	NA	6,7	12,6	21,5	27,7

⁽²⁾ when more than one anchor of the group is submitted to shear load
 $\gamma_{Ms} = 1,25$

$$V_{Rd} = \min(V_{Rd,c}; V_{Rd,cp}; V_{Rd,s})$$

$$\beta_V = V_{Sd} / V_{Rd} \leq 1$$

$$\beta_N + \beta_V \leq 1,2$$

f_b INFLUENCE OF CONCRETE

Concrete class	f_b	Concrete class	f_b
C25/30	1,1	C40/50	1,41
C30/37	1,22	C45/55	1,48
C35/45	1,34	C50/60	1,55

$f_{\beta,V}$ INFLUENCE OF SHEAR LOADING DIRECTION

Angle β [°]	$f_{\beta,V}$
0 to 55	1
60	1,1
70	1,2
80	1,5
90 to 180	2

