



ENERG
енергия · ενέργεια




JÄMÄ

JÄMÄ STAR 6 RST INVERTER



55 °C

35 °C



A+++

A+++



42 dB



dB

6
6
6
kW

6
6
6
kW



2019


811/2013




ENERG
енергия · ενέργεια



JÄMÄ JÄMÄSTAR 6 INVERTER+VLMSTAR300

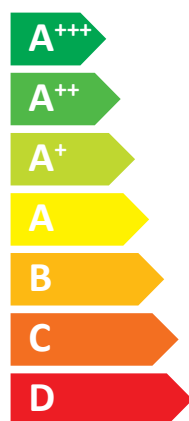

A+++

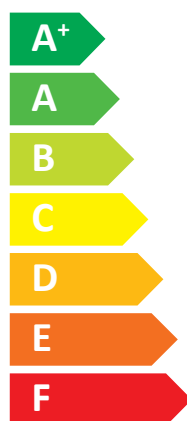

A



42 dB



dB



■ 6 kW
■ **6 kW**
■ 6 kW

2019

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

JÄMÄ

JÄMÄ STAR 6 RST INVERTER



A+++



A



A+++

A++

A+

A

B

C

D


E

F

G

A+++

+



+



+



+



A+++

A++

A+

A

B

C

D

E

F

G

A

Supplier's name:	Kaukora		
Model:	Jämä Star 6 RST Inverter		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A+++	A+++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	5,5	5,5	kW
Annual energy consumption for space heating, average climate	2188	2875	kWh
Annual electricity consumption for water heating, average climate	1642		kWh
Seasonal space heating energy efficiency, average climate:	200	150	%
Water heating energy efficiency, average climate:	102		%
Sound power level LWA indoors	42		dB
Rated heat output, cold climate:	5,5	5,5	kW
Rated heat output, warm climate:	5,5	5,5	kW
Annual energy consumption for space heating, cold climate	2481	3287	kWh
Annual electricity consumption for water heating, cold climate	1642		kWh
Annual energy consumption for space heating, warm climate	1408	1852	kWh
Annual electricity consumption for water heating, warm climate	1642		kWh
Seasonal space heating energy efficiency, cold climate:	211	157	%
Water heating energy efficiency, cold climate:	102		%
Seasonal space heating energy efficiency, warm climate:	201	151	%
Water heating energy efficiency, warm climate:	102		%
Sound power level LWA outdoors	-		dB

Data for package fiche

Controller class	VII		
Controller contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	204	154	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	215	161	%
Seasonal space heating energy efficiency of package, warm climate:	205	155	%

Model(s):				Jämä Star 6 RST Inverter				JÄMA			
Type of heat source/sink:				Brine-to-water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				Yes							
Heat pump combination heater:				Yes							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147											
Rated heat output		Prated	5,5	kW	Seasonal space heating energy efficiency		η _s	150	%		
Declared capacity for part load at outdoor temperature T _j				Declared coefficient of performance for part load at outdoor temperature T _j							
T _j = -7 °C	P _{dh}	5,0	kW	T _j = -7 °C	COP _d	3,06	-				
T _j = +2 °C	P _{dh}	3,0	kW	T _j = +2 °C	COP _d	3,97	-				
T _j = +7 °C	P _{dh}	2,0	kW	T _j = +7 °C	COP _d	4,63	-				
T _j = +12 °C	P _{dh}	1,2	kW	T _j = +12 °C	COP _d	4,86	-				
T _j = biv	P _{dh}	5,4	kW	T _j = biv	COP _d	2,84	-				
T _j = TOL	P _{dh}	5,4	kW	T _j = TOL	COP _d	2,84	-				
T _j = -15 °C (if TOL < -20 °C)	P _{dh}		kW	T _j = -15 °C (if TOL < -20 °C)	COP _d		-				
Bivalent temperature	T _{biv}	-10	°C	Operation limit temperature		TOL	-10	°C			
Cycling interval capacity for heating	P _{cyh}		kW	Cycling interval efficiency		COP _{cyh}		-			
Degradation co-efficient	C _{dh}	0,99	-	temperature		WTOL	65	°C			
Power consumption in modes other than active mode				Supplementary heater							
Off mode	P _{OFF}	0,002	kW	Rated heat output		P _{sup}	0,1	kW			
Thermostat-off mode	P _{TO}	0,007	kW								
Standby mode	P _{SB}	0,007	kW	Type of energy input		Electric					
Crankcase heater mode	P _{CK}	0,009	kW								
Other items											
Capacity control	variable			Rated air flow rate, outdoors				m³/h			
Sound power level, indoors/outdoors	L _{WA}	42/-	dB								
Annual energy consumption	Q _{HE}	2875	kWh	Rated brine or water flow rate, outdoor heat exchanger			0,68	m³/h			
For heat pump combination heater:											
Declared load profile		XL		Water heating energy efficiency		η _{wh}	102	%			
Daily electricity consumption	Q _{elec}	7,48	kWh	Daily fuel consumption		Q _{fuel}		kWh			
Annual electricity consumption	AEC	1642	kWh	Annual fuel consumption		AFC		GJ			
Approved by:											
Contact details		Kaukora Oy P.O Box 21, Tuotekatu 11, 21201 Raisio Finland									