

EAN: 6414150098734
static.oras.com/1038F-104



Kitchen faucet with high spout. Swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 0° or 60°). There are also in-built limitation options for water temperature and maximum flow-rate.

F = with flexible pipes

- Keuken
- Green Building
- Eengreeps
- Wastafelmontage
- Chroom
- Draaibare uitloop, Draaibereik beperkende optie
- Eengreeps bediend, Hendel met warm-koud-aanduiding
- Temperatuurbegrenzer
- Ø 40 mm keramisch binnenwerk voor debiet en temperatuur instelling
- Flexibele aansluitslangen
- 3S-installatie

Technical data

Flow properties


Flow-rate at 300 kPa (with flow controller)	0.054 l/s
Pressure loss 0.2 l/s (with flow reducers)	240 kPa




Technical properties

DN-size (nominal dimension)	DN8
Hot water supply	max. +80°C
Working pressure	50-1000 kPa
Connection size	G3/8
Projection	178 mm
Material	brass


Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

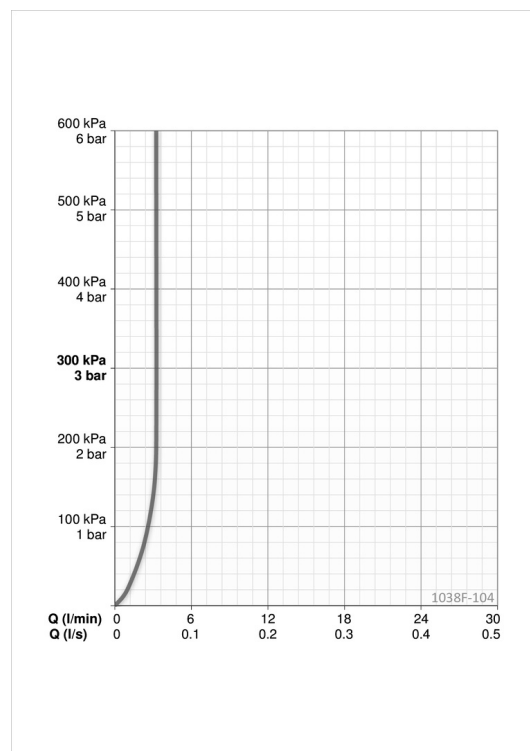

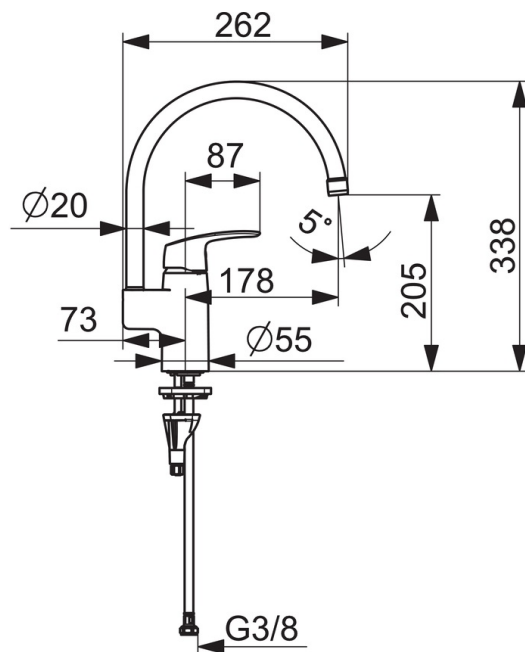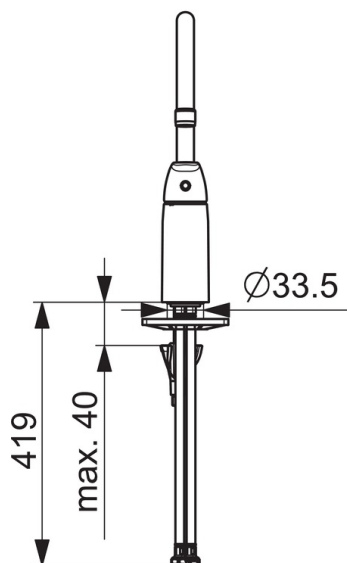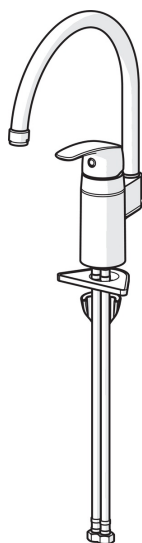

Spare parts

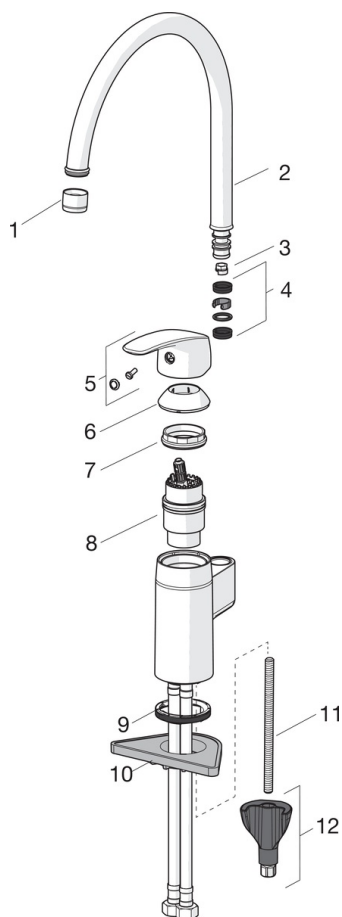

SP1038F

	Name	Code
01	Mousseur, M22x1 Chroom	232201
02	Uitloop Chroom	159695V
03	Begrenzer, 60° / 0°	159667/10
03	Begrenzer, 60° / 0°	159667V
03	Begrenzer, 120°	159670/10
04	Dichting	159499
05	Hendel Chroom	602502V
06	Kap Chroom	602589V
07	Schroefring	158726
08	Binnenwerk	158890
09	Wasser	1002371V
10	Verstevigingsplaat, 100x60mm	158825
11	Bevestigingsschroeven, M8x1, L=130	1000780V
12	Bevestigingsset	602610V