

Product Information

Name: Surface splash proof wall rocker switch for fixed installation

Technical Data: 16AX 250VAC

Frequency: 50Hz

Colour: Black

Main material: PC (Halogen free)

IP-Class: IP44 (The lowest IP degree must be considered when combinations of plug and socket outlets are in use)

Working temperature: -25°C to +60°C

Installation temperature: -5°C to +25°C

Fire hazard test: 94V-0(main parts)

The product complies with the standard(s): EN60 669-1

The product is in conformity with the provisions of the following European

directive(s): LVD, RoHS, WEEE

Certificate(s): CE, Semko

Technical info:

Surface mounted - protected against corrosion.

There is a knock-out draining hole in the bottom to let out condensation water.

Wiring diagram printed on the rear side.

The rocker and cover plate made by thermoplastic.

Screw terminals.

Flush wiring.


Connecting piece and strain relief are available for order.




Type designation:

E-No.	Type	Description/Remark
	U282	1-pole / 2-way , pattern No. 1/6

Drawing:

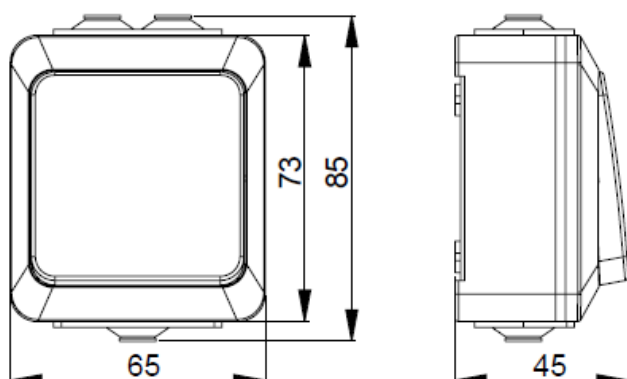

Wiring diagram:



Chang
g in 20:

00
5 519 86731098
ig@etman.cn