


psF
Pa

HIFEK 02

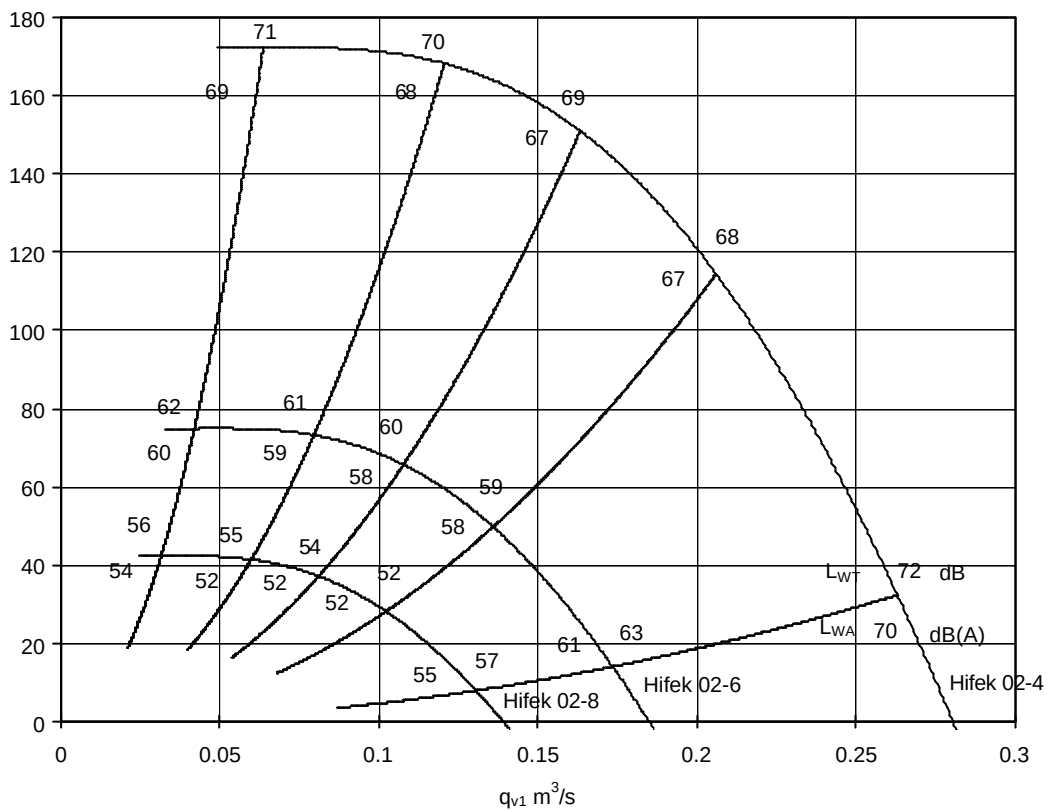

Alipainepeltti p_s Pa
Backspjäll

Korjaustermi kanavaan ΔK_{OKT} Korrektion till kanal								
63	125	250	500	1000	2000	4000	8000	n rpm
-10	-8	-6	-7	-8	-12	-15	-27	1470
-9	-7	-7	-8	-10	-13	-20	-28	970
-8	-6	-7	-8	-12	-15	-27	-30	730

Korjaustermi ympäristöön ΔK_{OKT} Korrektion till omgivning								
63	125	250	500	1000	2000	4000	8000	n rpm
-10	-7	-3	-4	-5	-6	-12	-23	1470
-9	-5	-3	-5	-5	-9	-18	-28	970
-7	-3	-4	-5	-6	-12	-23	-32	730