

DECLARATION OF PERFORMANCE

No. JTF004CPR

1. Unique identification code of the product type
Type, batch or serial number or any other element allowing identification of the product
Dry-pressed unglazed ceramic tiles, with water absorption $E_b < 0.5\%$
2. Intended use(s)
Ceramic Tiles for wall & floor
3. Name or registered trade mark, and contact address of the supplier
Johnson Tiles, Harewood Street, Tunstall, Stoke on Trent ST6 5JZ United Kingdom
4. System(s) of assessment and verification of constancy of performance (AVCP)
System 4
5. Declared performances

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	A1-A1FL	EN 14411:2012
Release of dangerous substance, for:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	>1500 N	
Tactility	NPD	
Bond strength/adhesion, for:	NPD	
Thermal shock resistance	Pass	
Durability for:		
- internal use:	Pass	
- Freeze-thaw resistance	Pass	

The performance of the product identified in point 1 is in conformity with the declared performances in point 5.

This declaration of performance is issued under the sole responsibility of the supplier identified in point 3.

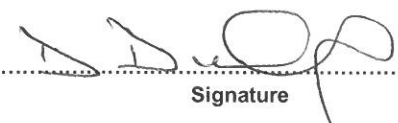
Signed for and on behalf of the manufacturer by:

Dave Dunlop, Technical Manager

.....
Name and function

Stoke on Trent, 24/11/22

.....
Place and date of issue


.....
Signature