

EAN: 6414150079108

www.oras.com/en/products/oras/product/7453



Thermostatic shower faucet with spout. Temperature handle equipped with safety stop at 38°C. Volume handle with diverter and EcoFlow control. The faucet includes litter filters and non-return valves. Oras Apollo shower set including hand shower with three spray options including EcoFlow control, adjustable max. 720 mm shower rail, a soap tray and 1750 mm shower hose.

- Shower
- Thermostatic
- Wall mounted
- Chrome
- Fixed spout
- integrated diverter with volume control
- shower rail, hand shower, shower rail set, shower hose (1750 mm)
- Eco flow
- safety stop against scalding at 38°C
- Litter filter(s), Non-return valve(s)

Technical data

Flow properties

Eco-flow at 300 kPa	0.17 l/s
Flow-rate at 300 kPa	0.26 l/s
Pressure loss with flow (0.2 l/s)	200 kPa

Technical properties


Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 3 mm
Material	brass



Regulations

EN standard	EN 1111
Noise class	I(ISO 3822) Oras lab.


Type approvals

STF certificate	STF VTT-RTH-00085-17
-----------------	-----------------------------

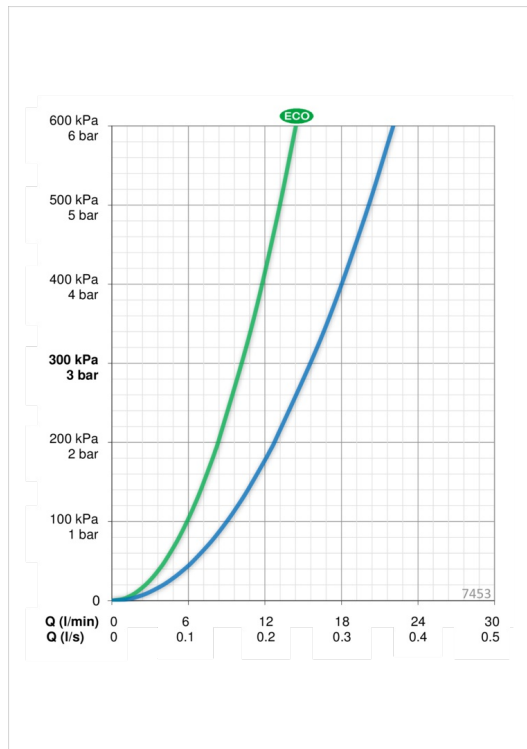

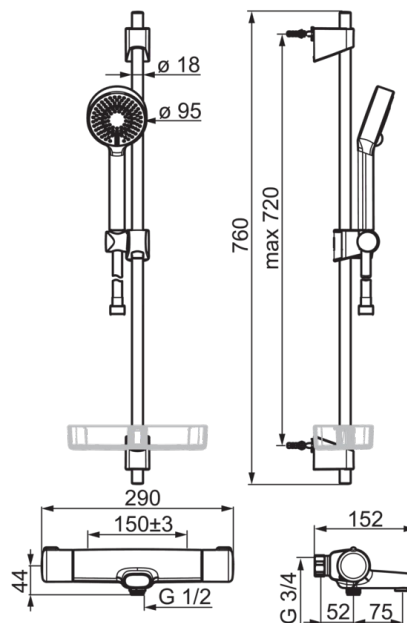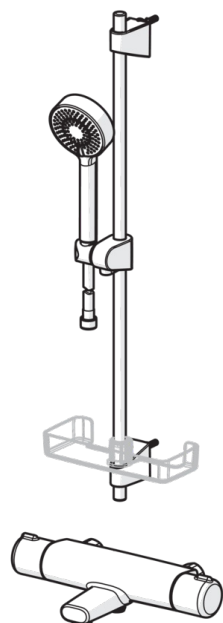


Spare parts

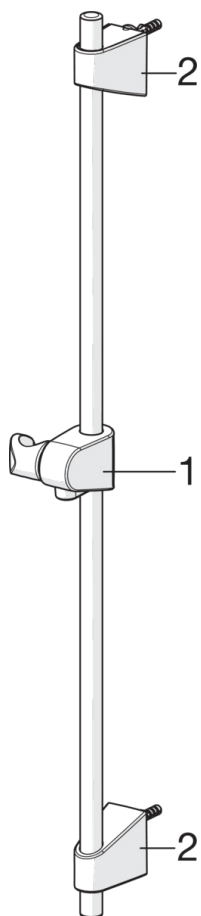

SP540

	Code
01	601189V
02	602331V

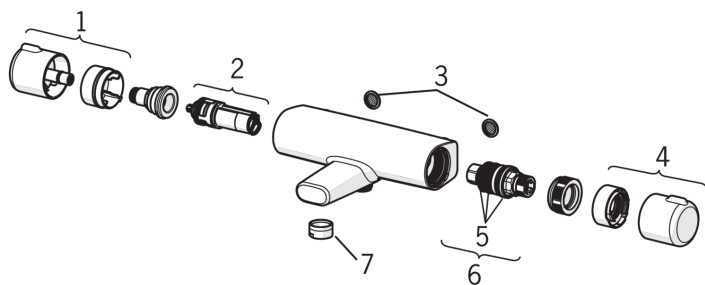

SP7462

	Code
01	602452V
02	601278V
03	198094/2
03	178375V
04	602431V
05	178796V
06	178780V
07	158556