

CELLO by Timberwise

Light Wooden Flooring made in Finland

OAK AUTUNNO (colour)



WOOD SPECIES

Oak is a hard, heavy and strong, as well as a fairly straight-grained tree. It is warm brown in colour and darkens with age. Considering its weight, oak does not move much and is therefore a popular interior decoration material.

Brinell hardness ~3,4-4,1 HB

Oak Autunno is oak's natural and classic shade. Small knots, natural tone variation, and so-called "mirror pattern" are allowed. Oak's natural grain pattern is shown beautifully.


PRODUCT MEASUREMENTS

- Thickness: 12,5 mm
- Width options: 185 mm
- Length: 2180 mm
- Surface: 1,5 mm +/- 0,2 mm
- Weight: 7,8 kg/m²
- Package information (185x2180mm): 2,82 m²/22,2 kg/9cm x 20,5cm x 220cm

STRUCTURE

- Single plank light wooden floor
- 0,7 mm micro bevel on the long sides
- 0,5 mm micro bevel on the short side
- 3-layer cross-glued structure:
- Surface 1,5 mm oak (sandable once)
- Middle layer plywood 9 mm
- Counter balance veneer spruce 2 mm

1,5 mm
9,0 mm
2,0 mm

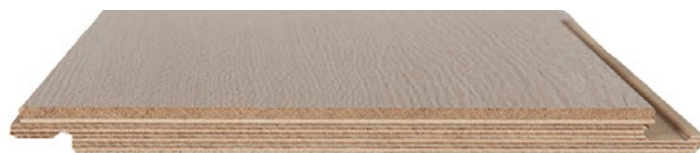

Plywood structure as a standard product

SURFACE TREATMENT OPTIONS

- UV hardened special surface treatment, lacquer
- Brushed surface with Nylon brushes

INSTALLATION OPTIONS

- WiseLoc locking tongue and groove
- 185 mm wide plank can be installed floating
- Suitable for installation with underfloor heating

WiseLock 5G



QUALITY

- FINNISH quality work - Finnish Key Flag- product
- PEFC - wooden raw material comes from certified and sustainably managed forests.
- ALLERGY LABEL - only wooden flooring certified by Finnish Allergy, Skin and Asthma Federation
- CE - products meet the essential requirements of the relevant EU directives and regulations.
- M1 - highest emission classification
- JAS1 - Glue joints meet the most demanding standards in the industry
- JAS F**** - product meets the most stringent formaldehyde emission test standard, the products use formaldehyde-free EPI glue.



OAK AUTUNNO



