

EAN: 6414150052484

www.oras.com/en/products/oras/product/6179



Touchless washbasin faucet with a swivel spout, aerator with a 6 l/min flow controller and temperature adjustment knob. Battery-operated 6 V. The temperature adjustment handle is equipped with a temperature limiter which can be bypassed by pushing a button. The faucet is equipped with litter filters and non-return valves.

- Public & Semi-public, Health & Care
- Battery-operated, Touchless
- Wall mounted
- Chrome
- Swivel spout
- Temperature control handle
- Litter filter(s)
- Adjustable settings via magnetic key

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/4
Installation width	CC150± 3 mm
Projection	200 mm
Material	brass

Software settings

Afterflow period	2 s ± 1 s
Automatic flush	off (off/24/48/72 h)
Automatic flush period	30 s
Max. flow period	2 min
Opening range	0-5 cm

Electronic properties


Battery	Lithium 2CR5 6 V
---------	-------------------------



Regulations

EMC Directive	CE 89/336/EEC
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 55


Type approvals

ETA-Danmark	VA 1.42/19635
-------------	----------------------

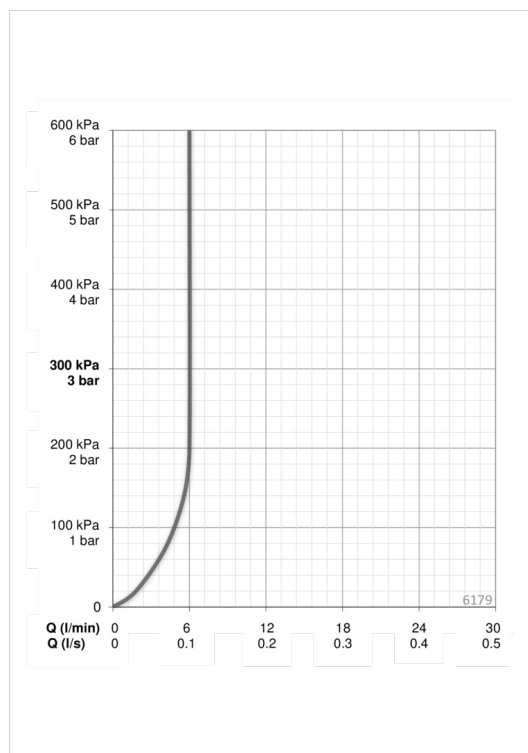

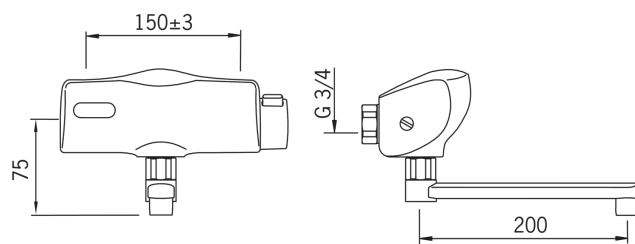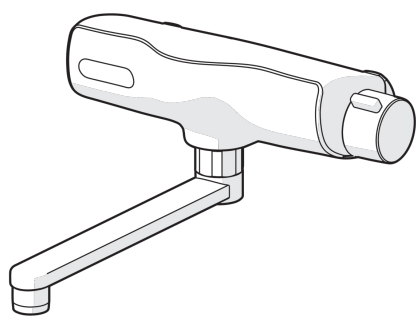

Spare parts

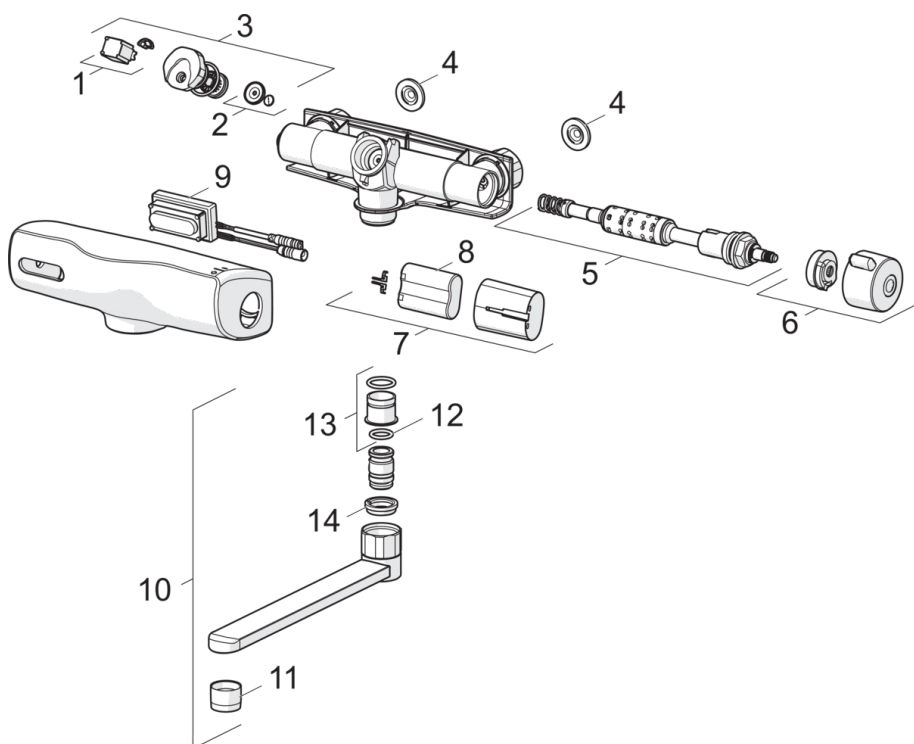

SP6179

	Code
01	199426V
02	199240V
03	199423V
04	178375V
05	199434V
06	169945V
07	199438V
08	198330
09	600201V
10	211212
10	211222
11	199435V
12	469360/10
13	219595/10
14	219563/10