

EAN: 6414150082313

www.oras.com/en/products/oras/product/3010F



Washbasin faucet with fixed spout and aerator. There are also in-built limitation options for water temperature and maximum flow-rate.

F = with flexible pipes

- Bathroom
- Single lever
- Deck mounted
- Chrome
- PCA® for a constant flow rate regardless of pressure fluctuations, HONEYCOMB® with improved lime protection, CACHE®, without housing directly screwed into the faucet spout
- 3S-installation system for safe and simple mounting

Technical data

Flow properties


Flow-rate at 300 kPa (with flow controller)	0.1 l/s
Pressure loss with flow (0.1 l/s)	100 kPa


Technical properties

Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	119 mm
Material	brass


Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

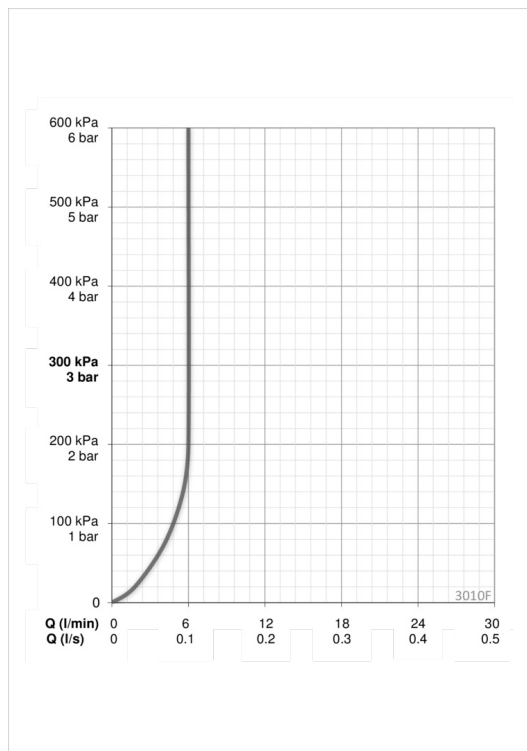

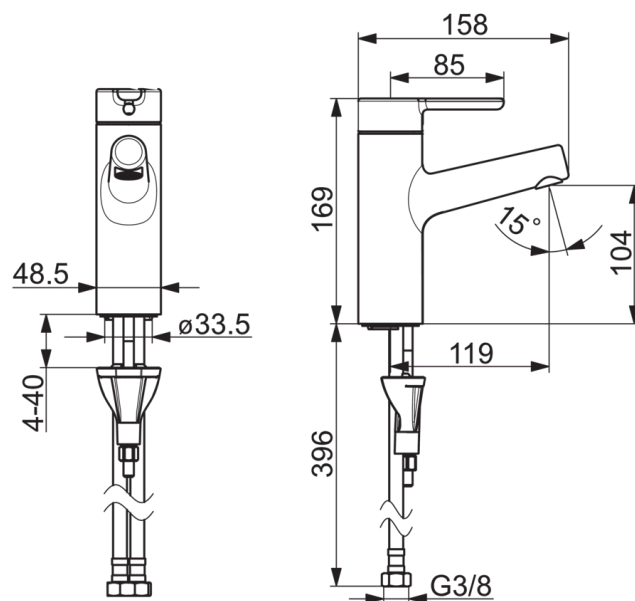

Spare parts

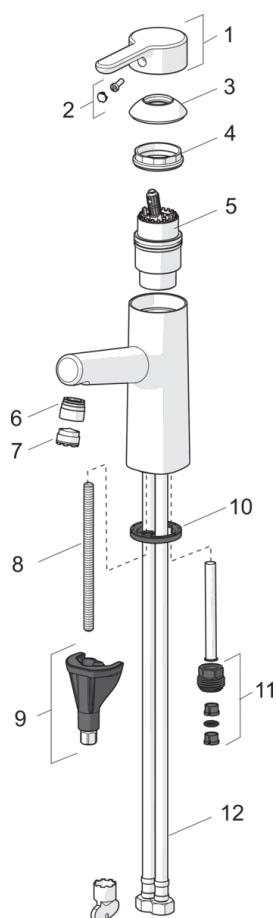

SP3000F

	Code
01	1003074V
02	1002323V
03	1001740V
04	158726
05	158890
06	1001722V
07	602671V
08	1000780V
09	602610V
10	601971V
11	159684
12	1001515V