



TIF FI 1219-3
NIBE F470
M111140

ÄÄNITEHOTASO F470

A-painotettu äänitehotaso standardin EN 12102 mukaan

dBA re 1pW

		Min ¹	Nominell ²	Max ³
Tuote	$L_{W(A)}$	51,5	52,5	54,5
Jäteilmakanava	$L_{W(A)}$	43,0	52,5	59,5
Poistoilmakanava	$L_{W(A)}$	41,0	50,0	57,5
Ulkoilma	$L_{W(A)}$	43,0	49,0	54,5
Tuloilma	$L_{W(A)}$	43,5	51,0	56,0

¹ 110 m³/h paineella 100 Pa

² 190 m³/h paineella 175 Pa

³ 270 m³/h paineella 240 Pa

Äänitehotaso standardin EN 12102 mukaan

dB re 1pW

		Min ¹	Nominell ²	Max ³
Tuote	L_W	61,0	64,0	66,0
Jäteilmakanava	L_W	55,0	64,5	72,0
Poistoilmakanava	L_W	54,0	63,0	70,0
Ulkoilma	L_W	54,5	60,0	65,5
Tuloilma	L_W	55,0	62,0	67,5


¹ 110 m³/h paineella 100 Pa

² 190 m³/h paineella 175 Pa

³ 270 m³/h paineella 240 Pa


F470

Äänitehotaso
(dBA re 1pW)

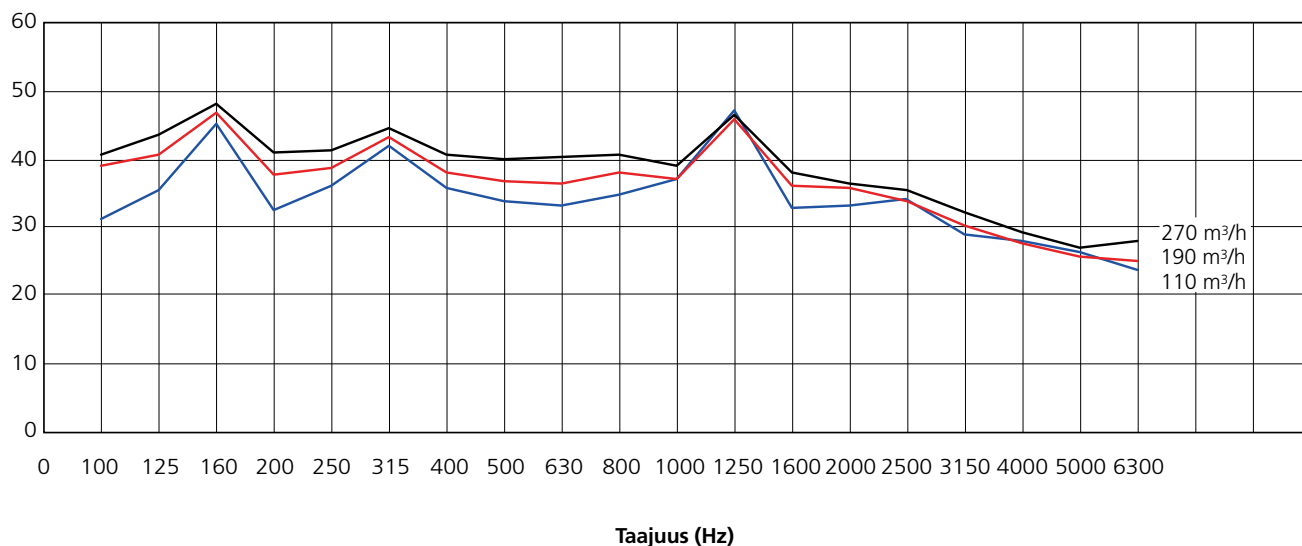


Jäteilmakanava

Äänitehotaso
(dBA re 1pW)

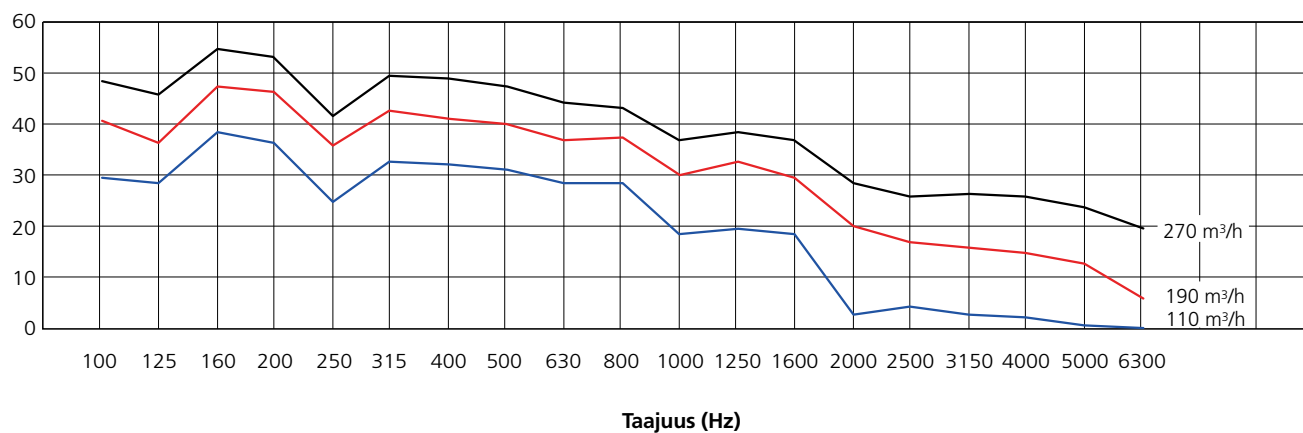


Poistoilmakanava

Äänitehotaso
(dBA re 1pW)

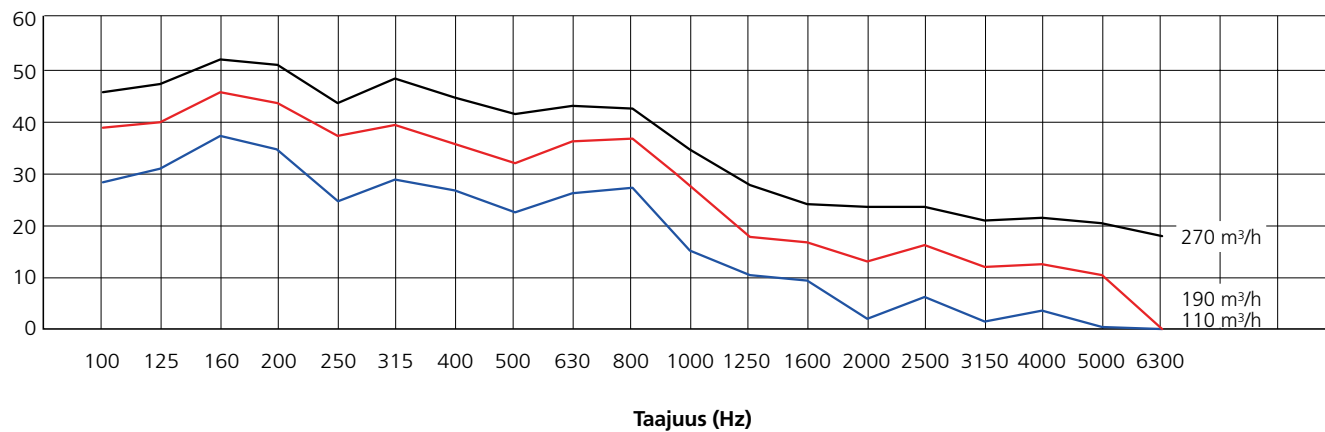

Ulkoilmakanava

Äänitehotaso
(dMA re 1pW)

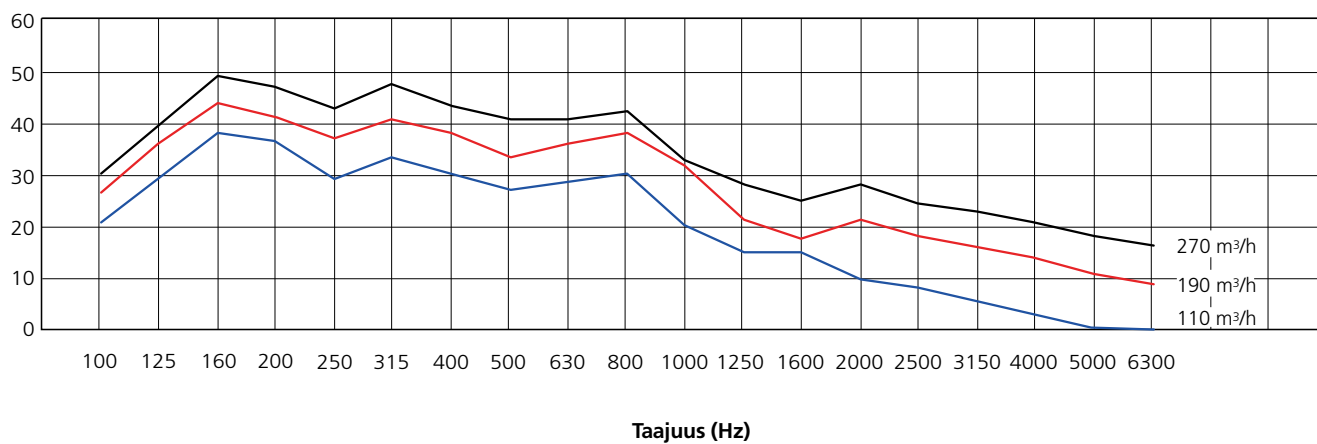

Tuloilmakanava

Äänitehotaso
(dMA re 1pW)

