


Ficha técnicaTechnical Data Sheet: **FT0279**

TECHNICAL INFORMATION

SERIE : TECH
MODEL : ATLANTIS TEAL
COLOUR : BLUE
FINISH: GLOSS
SIZE: 0,302 m.x 0,294 m. (Área : 0,088 m2)
THICKNESS : 8 mm

APLICACIONES:

INDOORS: ONLY WALLS
OUTDOORS: NO
WET AREAS: YES , ONLY WALLS
POOLS: NO

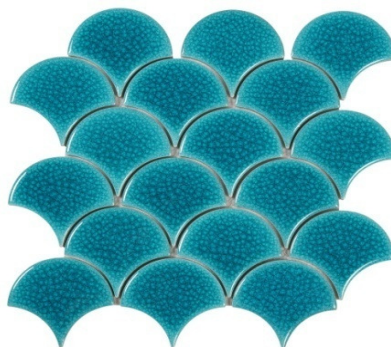

DESCRIPTION

CERAMIC TILE MOSAIC WITH PORCELAIN BASE AND GLOSSY GLAZED FINISH

DUE TO THE REACTIVE/CRACKED GLAZE USED IN THIS ITEM ITS FINAL APPEARANCE MAY DIFFER SLIGHTLY FROM THIS IMAGE

CHARACTERISTICS

TYPOLOGY: GLAZED PORCELAIN AND PRESSED
SIZE: 302 mm x 294 mm x 7,8 mm
IT HAS VIRTUALLY A ZERO POROSITY SURFACE, HAS A HIGH RESISTANCE TO ADVERSE WEATHER FACTORS, ESPECIALLY TO FROST. ALL THIS FORMING A MASS OF SOLID AND COMPACT CLAY DOUGH MATERIAL FIRED AT A TEMPERATURE OF 1210 DEGREES CELSIUS.

ESPECIFICACIONES

NORM	DESCRIPTION	MINIMUM REQUIRED	SPECIFICATION
			INTERMATEX
ISO 10545-2	Length and width	max. 0.6%	< 0.1%
ISO 10545-2	Flatness of surface	max. 0.5%	< 0.2%
ISO 10545-3	Water absorption	max. 0.5%	< 0.1%

INSTALLATION

INSTALLATION IS MADE WITH FLEXIBLE ADHESIVES, CONTAINING SYNTHETIC ADDITIVES FOR NON ABORBENT MATERIAL. ADHESIVE APPLIED WITH PROPER SQUARED NOTCH TROWEL(3-4 mm). ONCE THE MOSAIC SHEET IS LAID DOWN USE A RUBBER TROWEL OR GROUT FLOAT TO PRESS TO FULLY GUARANTEE THE ADHESION.

CLEANING

CLEAN AND SOFT CLOTH AND DOMESTIC SOAP, NEUTRAL

RECOMMENDATIONS

ALWAYS USE PROTECTIVE GLOVES AND ANTI-CRUSHING FOOTWEAR, PREFERABLY STEEL TOE BOOTS

* SEAL FOR WET AREAS AND/OR IN CASE OF GROUTING WITH DARK COLOURS..

STORAGE

PRODUCT SHOULD BE STORED IN A FLAT SURFACE AND IN A SHELTERED AREA AWAY FROM THE RAIN

PACKING

Pzs/ctn	ctn per pallet	Kg. Pallet	sqm per pallet
10	81	949.0	71.93