

Pipe Trunking Thorsman TRL range






Design and dimensions



Туре	Α	В	С
TRL-D5630	56	30	53.5
TRL-D5656	56	56	53.5
TRL-D7640	76	40	73.5

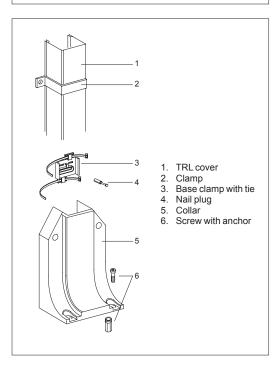

Description

The TRL range includes pipe and cable trunking made of rigid PVC or aluminium. The products are used to conceal heating pipes, wiring and cables. The TRL trunking comes in the form of a cover that is fixed to the base material by base clamps. Pipes, cables, etc. are fixed to the base clamps by self-locking ties, for a quick, stable and attractive installation. The cover is available in several sizes.

Installation

For vertical pipe installations it is best to screw the upper base clamp into place first, then the lower base clamp. The other base clamps can easily be inserted under the cables or pipes when they have been installed.

For joints and junctions, use the jointing piece. For extra secure locking of the cover when installed in highly exposed surroundings, use the clamp. When going through for instance a floor between storeys of a building, use a collar and collar seal to cover and effectively seal the hole. When removing the cover, grip the upper or lower part of the cover and pull straight out.

Benefits

- The base clamp is designed to be used with plumbing and electrical installations a wide range of applications
- Snap-on fitting and self-locking ties for very quick and easy installation
- Base clamps with ties fix cables and pipes, while the cover simply conceals the installation
- · Cables and pipes can be installed at an early stage
- No risk of damage to the cover, since it can be snap-fitted at a late stage in the building project

Material data

Material cover	PVC, rigid, self-extinguishing		
	Colour spec.	White NCS 0401-Y62R	
Material cover	Aluminium, natura	l anodized	
Material accessories	PA (Polyamide)		
	Colour spec.	Black NCS 9500	
	ABS (Acrylonitrile-butadiene-styrene)		
	Colour spec.	White NCS 0401-Y62R	
		Grey NCS 3502-Y	
	PC/ABS (Polycarb	onate/ABS)	
	Colour spec.	White NCS 0502-Y	
		Grey NCS 3502-Y	
	PE (Polyethylene)		
	Colour spec.	Black NCS 9500	
Temperature range PVC	-20°C to +60"C		

Cable capacity

No. of cables (with existing ties)				
Туре	Ø7	Ø 10	Ø 12	Ø 14
TRL-D5630	14	6	4	3
TRL-D5656	23	10	8	5
TRL-D7640	25	12	9	6

Pipe capacity

· ·po oupuo.ty				
Туре	Pipe diameter	No. of pipes		
TRL-D5656 16 mm with compression coupling		2		
	22 mm with solder coupling	2		
TRL-D7640	22 mm with compression coupling	2		
	28 mm with solder coupling	2		

Heating pipes with a temperature of up to $+85^{\circ}$ C can be run in the cover. If the outside temperature of the pipes is more than $+65^{\circ}$ C, there should always be an air gap between the pipes and the inside of the cover.

Pipe Trunking Thorsman TRL range



Rar	nge TRL						
		Туре	Colour	Dimensions A/B/C (mm)	Qty per package	EAN code	Ref. No.
		Cover					
L12740		Cover to be mounted on base clamps. Material: Aluminium (anodized) or PVC (white).					
		TRL-D5630	Aluminium, natural PVC, white	56/30/2500	10	7315885321106 7315885320109	5321100 5320100
		TRL-D5656	Aluminium, natural	56/56/2500	10	7315885321120	5321120
		TRL-D7640	Aluminium, natural PVC, white	76/40/2500	10	7315885321212 7315885320215	5321210 5320210
		Base clamp with	ties				
L12750		Base clamp with ties intended to fix cables and to attach the cover to the wall or other base material. The clamp is screw-fixed to the base surface. Material: PA.					
		TRL-H56	Black	55/6/52	50	7315885322011	5322010
)	TRL-H76	Black	72/8/56	100	7315885322028	5322020
		Jointing pieces	and for this to and the sale	TO TO			
L12760		Material: ABS.	e used for joints and junct	ions of the TRL covers.			
		TRL-S5630	White	60/35/31	100	7315885322165	5322160
		TRL-S5656	Grey	60/35/57	100	7315885322172	5322172
		TRL-S7640	White	80/35/41	100	7315885322189	5322180
		Stop ends					
L12770		Stop end to be use Material: ABS.	ed for the termination of th	e TRL covers.			
		TRL-ES5630	Grey White	60/31/30	100	7315880002918 7315885322110	5322112 5322110
		TRL-ES5656	Grey	60/57/30	100	7315885322127	5322122
		TRL-ES7640	White	80/41/30	100	7315885322134	5322130
		Collars					
L53980		Collar to be fitted w Material: PC/ABS.	where TRL covers pass the	rough floors and ceilings.			
		TRL-KN5630	Grey White	159/88/110	1	7315880002956 7315885322417	5322414 5322410
		TRL-KN5656	Grey White	159/88/110	1	7315880002970 7315885322424	5322424 5322420
		TRL-KN7640	White	159/88/110	1	7315885322431	5322430
		Base plate					
L35990	Ø	•	sed for collar TRL-KN. To	be fitted at the collar when	for instance passi	ng through a floor, to sea	l agains water.
		TRL-TKN5676	Black	6.5/113/89.5	10	7315885322455	5322450
		Clamp					
L12780		Clamp to be used Material: Aluminium		of the TRL covers to the ba	ase material is ne	eded.	
	9	TRL-B5630	Natural	30/116.5/31.5	10	7315885322554	5322550
		TRL-B5656	Natural	30/117/58	10	7315880003038	5322551
		Cover TML					
L12740		Cover to be clipped Material: PVC (whi					
		TML-TT20	PVC, white	20/16/2550	20	7315885000018	5000013

Release date: 2012-10-09 Rev. 1 Date: 2013-05-08 Doc. No: 20079306