

MAGNEOS






Installation instructions

Instructions de montage
Montageanleitung
Montage instructie

Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning







Kokoonpano- ja kiinnitysohjeet
Montaj yönergeleri
Instrukcja montażu
Οδηγίες συναρμολόγησης

Szerelési utasítások
Návod k montáži
Návod k montáži
ИНСТРУКЦИЯ ПО МОНТАЖУ



A(Ø) B(MM)

MRS501 (3C) MCS501 (BA)	CDM-T 35/50/70/150W	163	260	✓	1860/1860/2530	0.8	✓	✓	✓
	CDM-T 100W			✓	1860/1860/2530		✓	✓	
	CDM-TF/TW 50/70W				1860/1860/2530		✓	✓	
	SDW-TG 50/100W				1980				
	CDM-R30 35W/70W				1930				
MRS502 (3C) MCS502(BA)	CDM-TC 35/50/70W	112	213	✓	1270	0.8	✓	✓	✓
	CDM-TCF/TCW 50-70W			✓	1270		✓	✓	✓
	CDM-Tm 20/35W			✓	1180		✓	✓	✓
LRS502 (3C) LCS502 (BA)	HAL-TC 45W			✓	1280		✓	✓	✓

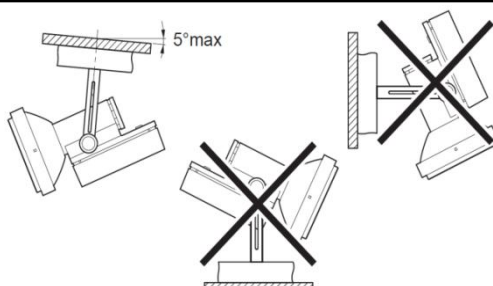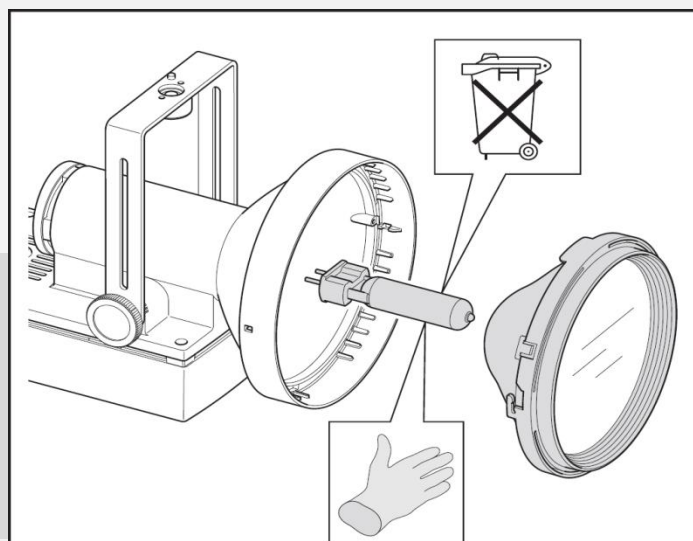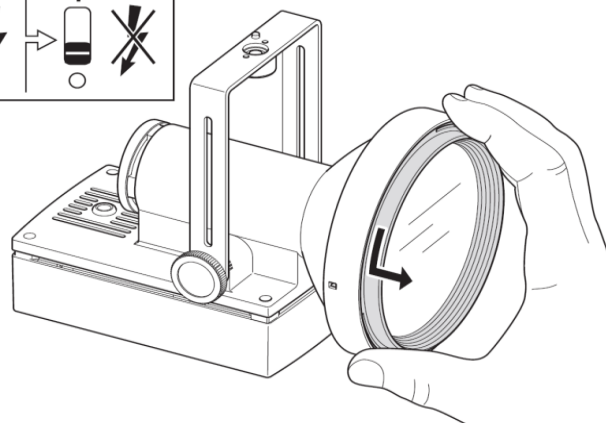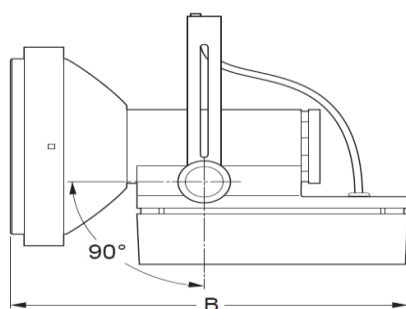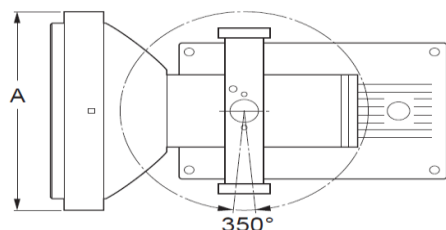

- Peut seulement être installé en dehors du volume d'accessibilité au toucher
- Only to be installed outside arms reach

4411 340 64191

Version Date:2012/07/04

1 /





Data subject to change without notice

Printed in France


www.philips.com/lighting

PHILIPS




MCS/LCS/ 501/502 ...BA

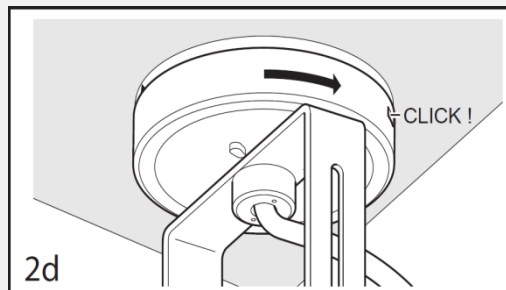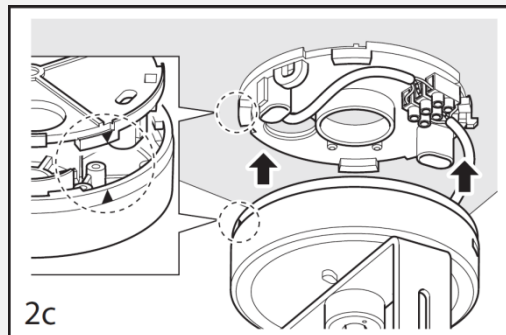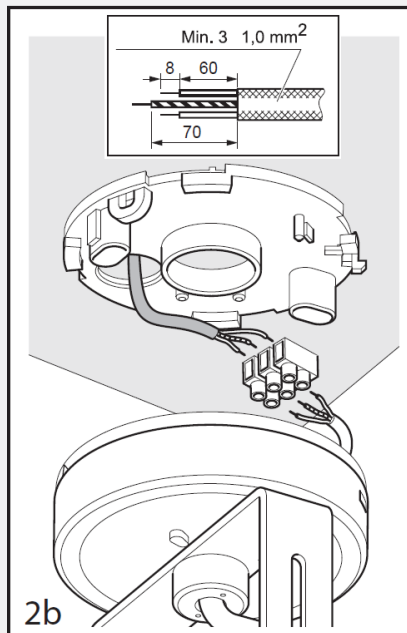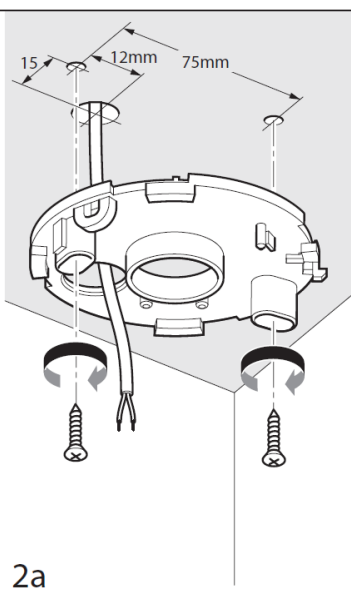

MRS/LRS 501/502 ...3C




PHILIPS 3C~ RCS750
Global 3C~ & 3C~ DIN Euro
(Eutrac, Erco, RZB, Iguzzini,
Hoffmeister....)

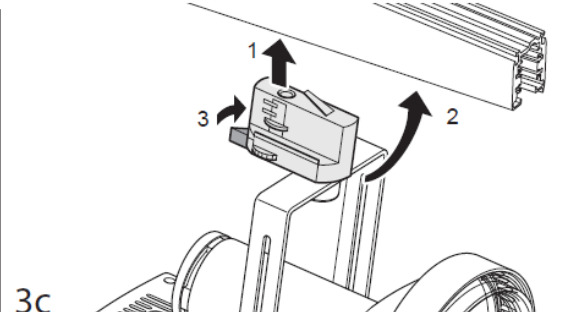


- F - Le luminaire ne doit être utilisé que complet avec son écran de protection.
UK - The luminaire shall only be used complete with its protective shield.
D - Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
NL - De armatuur mag alleen met beschermplaat gebruikt worden.
I - L'apparechio deve essere esclusivamente utilizzato con i relativi schermi protettivi.
SP - La luminaria debe instalarse con vidrio de protección.
S - Armaturen f äar endast användas tillsammans med dess skyddglas.
FL - Va laisin saa ainoastaan käyttää suojalasinsa kanssa.
PL - Do oprawy musi być zamontowany klosz ochronny.
P - Esta luminária apenas deve ser utilizada completa com vidro de protecção.



- F - Distance minimale entre lampe et matériaux combustibles: voir symbole sur luminaire.
UK - Minimum distance between lamp and any combustible materials: see symbol on luminaire.
D - Kleinsten Abstand zur angestrahlten Fläche: siehe Symbol auf der Leuchte.
NL - Minimale afstand tot aan te stralen oppervlakken: zie symbool in armatuur.
I - Distanza minima tra la lampada ed i materiali infiammabili: vedere il simbolo nell'armatura.
SP - Distancia mínima entre la bombilla y cualquier material inflamable: ver símbolo en la luminaria.
S - Minsta avstånd mellan armatur och belyst föremål: Sesymbolen på armaturen.
FL - Lampusta palaviin aneisiin säilytettävä minimietäisyys: Katso vatonlähteessä olevaa symbolia.
PL - Minimalna odległość między źródłem światła a oświetlaną powierzchnią: patrz cechowanie oprawy.
P - Distância mínima entre a lampada e materiais combustíveis: Ver o símbolo na luminária.



	CDM-Tm LPF 20W	CDM-Tm HPF 20W	CDM-Tm 35W	CDM AV 35W	CDM AV 70W	CDM PV & SH					SDW	
	20W	20W	35W	35W	70W	35W	50W	70W	100W	150W	50W	100W
Electrical Characteristics												
Inom (A)	0.21	0.21	0.4	0.19	0.34	0.2	0.26	0.34	0.5	0.7	0.25	0.5
I max (A)	30	30	25	6	8	28	26	45	40	40	30	50
Tref (ms)	400	400	400	10	10	0.2	0.25	0.2	0.4	0.3	0.5	0.5
Nb Ballasts Max												
MicroCircuitBreaker												
B10A	X22	X22	X15	X36	X20	X10	X15	X8	X10	X8	X10	X6
B16A	X36	X36	X24	X58	X32	X16	X24	X14	X17	X12	X15	X9
C10A	X36	X36	X24	X36	X20	X17	X24	X14	X10	X14	X15	X9
C16A	X61	X61	X40	X58	X32	X27	X40	X23	X17	X20	X25	X15



ZRS501 3.3mm x
Ø145.5mm Borosilicate

ZRS502 3mm x Ø89.5mm
Borosilicate

