




MAKE IT LAST.

# DRYWALL TO LIGHT STEEL SCREW PH2 PHOSPHATED 3,5X25MM

## CARBON STEEL STANDARD TENSILE

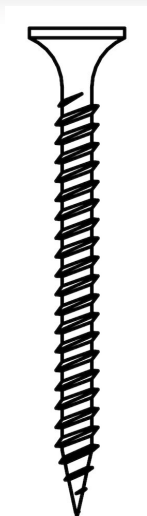

### 35B25MP

#### APPLICATIONS

Drywall to light steel


#### TECHNICAL SPECIFICATIONS

|                      |                               |
|----------------------|-------------------------------|
| Collation type       | Plastic collated              |
| Screw head type      | Bugle head                    |
| Screw recess         | Philips 2                     |
| Screw thread type    | Fine                          |
| Rotations per minute | 3300 RPM                      |
| Wire material        | Carbon steel standard tensile |
| Finish               | Phosphated (grey)             |
| Point type           | Sharp                         |
| Pointangle           | 23 °                          |
| Screw length         | 24.2 - 25.8 mm                |
| Screw diameter       | 3.4 - 3.6 mm                  |

#### LOGISTICAL SPECIFICATIONS

|                  |               |
|------------------|---------------|
| GTIN             | 8715274015521 |
| Package quantity | 1000 pieces   |
| Net weight       | 1.46 kg       |

#### FASTENER SPECIFICATIONS



#### CE SPECIFICATIONS

|                          |         |
|--------------------------|---------|
| Service class            | 1       |
| Inner threaded diameter  | 2.6 mm  |
| Threaded/profiled length | 20.5 mm |