


# FLOORING WOOD TO WOOD SCREW 4,2X55MM STAINLESS STEEL AISI 304 (A2)

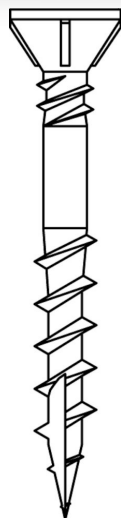

## 42RH55MS

### APPLICATIONS

Wood-to-wood applications, subfloor

### TECHNICAL SPECIFICATIONS

Collation type	Plastic collated
Screw head type	Small with 4 nibs
Screw recess	Senco drive 25
Screw thread type	2/3 coarse
Rotations per minute	2300 RPM
Wire material	Stainless steel AISI 304 (A2)
Point type	Type 17 cut point
Pointangle	23 °
Screw length	53.8 - 56.2 mm
Screw diameter	4.1 - 4.35 mm

### LOGISTICAL SPECIFICATIONS

GTIN	8715274026619
Package quantity	1000 pieces
Net weight	3.38 kg

### FASTENER SPECIFICATIONS



53.8 - 56.2 mm

4.1 - 4.35 mm

### CE SPECIFICATIONS

Service class	3
Inner threaded diameter	2.63 mm
Threaded/profiled length	36 mm
Characteristic yield moment	2400 Nmm
Characteristic head pull through parameter	16 N/mm <sup>2</sup>
Characteristic tensile capacity	3200 N
Torsional ratio	≥ 1,5
Characteristic torsional resistance	1.88 Nm
Characteristic torsional strength	3.47 Nm