


MD SMOOTH STRIPNAIL 3,8X130MM CARBON STEEL STANDARD TENSILE

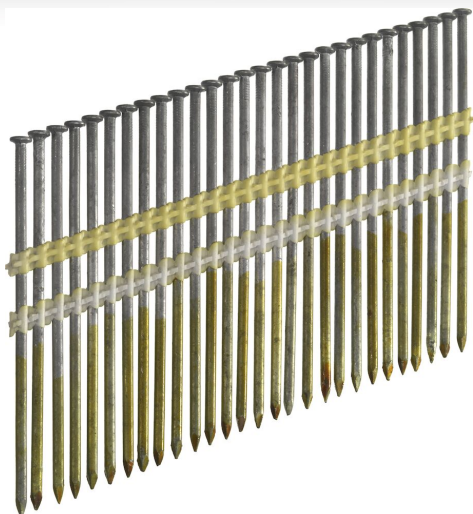

MD65ASBS

APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates


TECHNICAL SPECIFICATIONS

Collation angle	21 °
Collation type	Plastic collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Full round head
Nail shank type	Smooth shank
Point type	Diamond
Pointangle	40 °
Nail length	130 mm
Nail diameter	3.8 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274037325
Package quantity	1400 pieces
Net weight	20.51 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

CE fastener type	Round cross-section plain shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Head cross sectional area	43 mm
Characteristic yield moment	6092 Nmm
Characteristic head pull through parameter	34.12 N/mm ²
Characteristic tensile strength	621 N/mm ²