


# MD SMOOTH STRIPNAIL 3,8X120MM CARBON STEEL STANDARD TENSILE

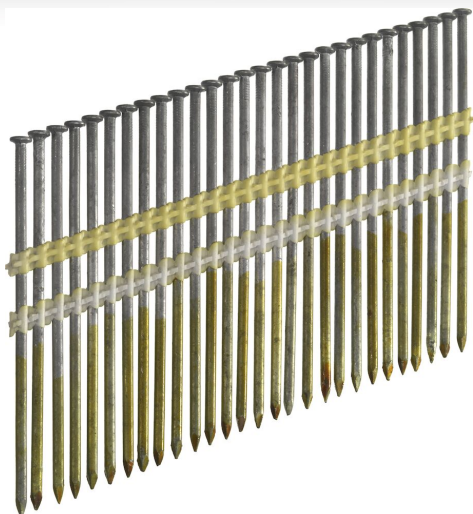

## MD63APBS

### APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates

### TECHNICAL SPECIFICATIONS

|                 |                               |
|-----------------|-------------------------------|
| Collation angle | 21 °                          |
| Collation type  | Plastic collated              |
| Wire material   | Carbon steel standard tensile |
| Finish          | Bright basic standard tensile |
| Coating         | Sencoted                      |
| Nail head type  | Full round head               |
| Nail shank type | Smooth shank                  |
| Point type      | Diamond                       |
| Pointangle      | 40 °                          |
| Nail length     | 120 mm                        |
| Nail diameter   | 3.8 mm                        |

### LOGISTICAL SPECIFICATIONS

|                  |               |
|------------------|---------------|
| GTIN             | 8715274051567 |
| Package quantity | 1400 pieces   |
| Net weight       | 15.21 kg      |

### FASTENER SPECIFICATIONS



### CE SPECIFICATIONS

|                                            |                                      |
|--------------------------------------------|--------------------------------------|
| CE fastener type                           | Round cross-section plain shank nail |
| Coating type                               | Coating type 3                       |
| Head cross sectional area                  | 43 mm                                |
| Characteristic yield moment                | 6092 Nmm                             |
| Characteristic head pull through parameter | 34.12 N/mm <sup>2</sup>              |
| Characteristic tensile strength            | 621 N/mm <sup>2</sup>                |