




— PRODUCT DATA SHEET

iH5R

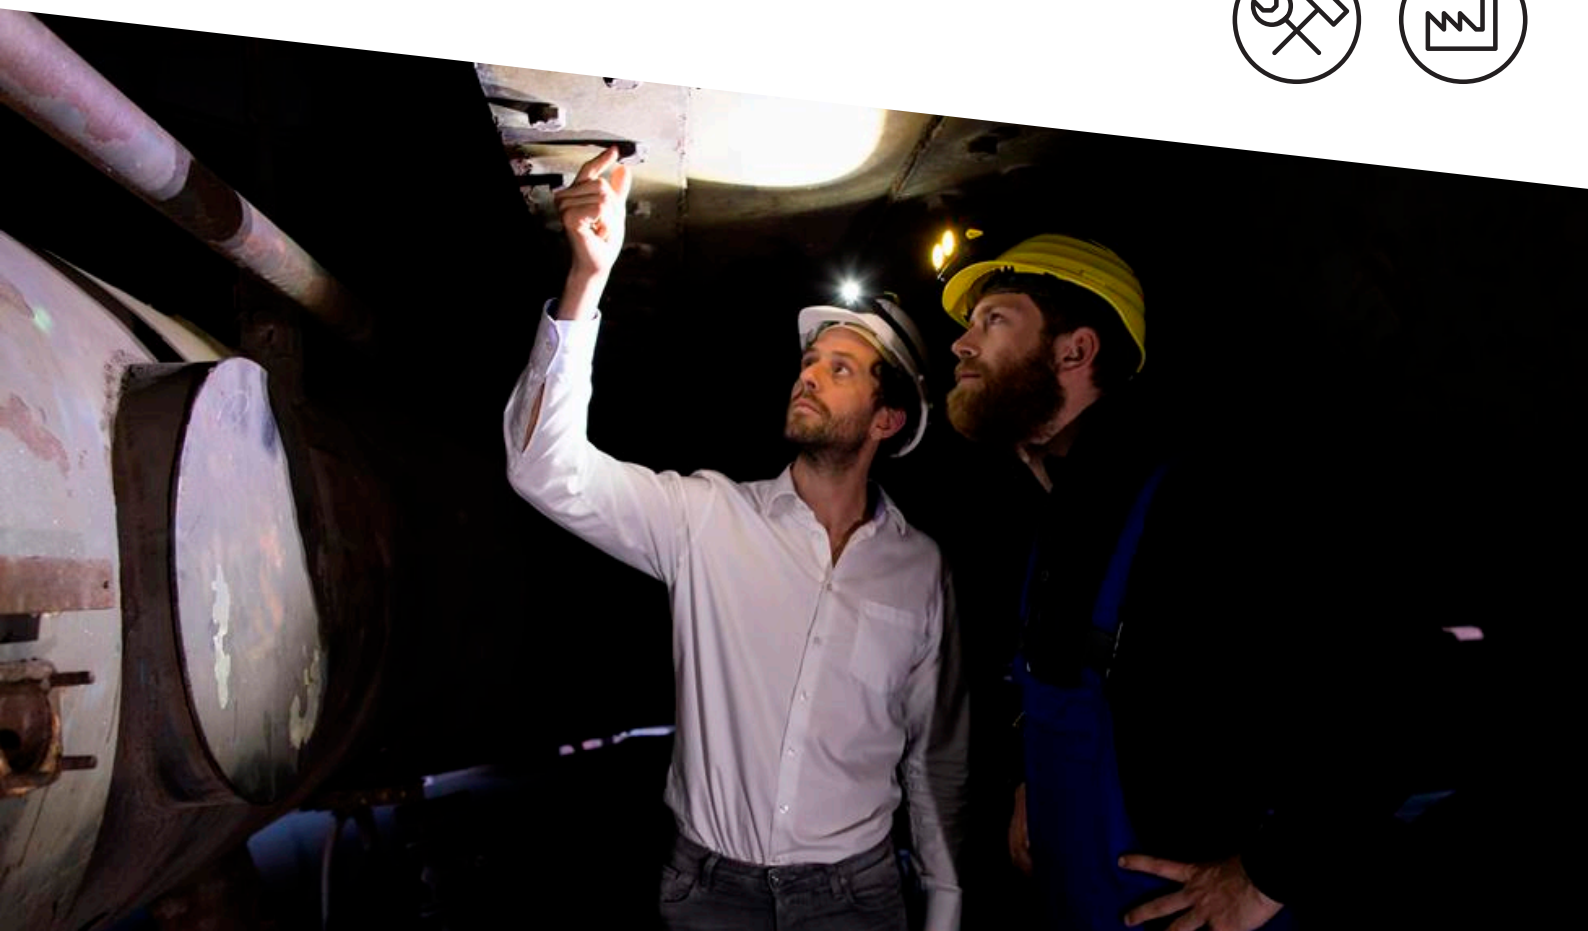

iH5R

PRODUCT DESCRIPTION

The compact and powerful iH5R features a Mounting System to convert it from headlamp to multi-purpose lamp in just a few steps. Power with the included rechargeable battery or regular AA alkaline battery. The light cone and lighting range can be adjusted to different conditions. You can mount the lamp on helmets via the rubber-coated head strap or the included adhesive mounting material.

- Two battery types (lithium-ion and AA) combine the benefits of rechargeable and disposable batteries
- Innovative Mounting System allows for easy placement and removal of the lamp head for maximum flexibility
- Numerous fastening options thanks to the metal clip on the outside of the lamp
- Advanced Focus System for easy, intuitive adjustment of the light beam
- Compact, lightweight housing (98 g) with impressive lumen output
- Helmet mounting options: Rubber-coated head strap, adhesive mounting material



TECHNICAL DATA

Head diameter [mm]	31
Weight incl. batteries [g]	98
Weight without batteries [g]	76
Focus function	Yes
Head material	PC
Tube material	PC + ABS
Optic	Plastic lense (PMMA)
Headband material	Elastic fabric
Headband type	Side headband
Head movement type	Stepless movement
Head movement angle [°]	60
Headband specifications	Detachable, Elastic, Rubberised back, Washable

POWER SUPPLY

Power source type	Rechargeable battery
Battery quantity	1
Battery type	Li-ion
Total battery voltage [V]	3.7
Total battery capacity [mAh]	750
Total battery energy ² [Wh]	2.77
Rechargeable	Yes
Charging time ⁵ [min]	150
Energy modes	Energy Saving
Energy status indicator	Battery Indicator, Charge Indicator, Low Battery Warning
Usable batteries	AA Alkaline 1.5V, AA NiMH 1.2V

FURTHER SPECIFICATIONS

IP class	IP54
Drop test (drop height) [m]	2
Working temperature range [°C]	-20 to +40

LIGHT FUNCTIONS

Low Power, Power

LIGHT SOURCE

Amount LEDs	1
LED type	High Power LED
Color	White
Color temperature [K]	6000 to 7500
Color rendering index (CRI)	70

LIGHT VALUES

ANSI – Energy Saving	Boost	Power	Mid Power	Low Power
Light output ¹ [lm]		400		20
Beam distance ¹ [m]		180		40
Run time ¹ [h]		4		35

SWITCH

Front Switch

TECHNOLOGIES

Advanced Focus System³, Rapid Focus, Smart Light Technology, Dual Power Source, Magnetic Charge System

iH5R

PACKAGING AND LOGISTICS



PACKAGING INFORMATION

Type of packaging	Box
Scope of delivery	1 set of rechargeable batteries, Magnetic charging cable, Mounting material
Item No.	502025
Customs tariff number	8513100000
Color	yellow

SINGLE PACKAGE

Dimensions W x H x D [cm]	10 x 12 x 6.5
Gross weight [g]	225
GTIN-13	4058205016025

INNER CARTON

Unit	6
Dimensions W x D x H [cm]	31 x 13.5 x 14.5
Gross weight [g]	1490
GTIN-13	4058205016032

EXPORT CARTON

Unit	24
Dimensions W x D x H [cm]	33 x 28.5 x 31.5
Gross weight [kg]	6.5
GTIN-13	4058205016049

iH5R

FURTHER PRODUCT INFORMATION

Helmet mounting options: Rubber-coated head strap, adhesive mounting material



iH5R

ACCESORIES

PRODUCT CATEGORY	ITEM NUMBER	PRODUCT NAME
Charger / Cable	0380	USB Car Charger
Battery	500985	14500 Li-Ion rechargeable battery 750 mAh
Charger / Cable	500986	Charging station and 14500 li-ion rechargeable
	502093	battery Powercase
Fastenings / Brackets	502220	Helmet Connecting Kit Type D
Fastenings / Brackets	502223	Helmet Connecting Kit Type G
Charger / Cable	502271	USB Adapter 2.4A
Fastenings / Brackets	502313	Helmet Band Fixing Clip Type A


iH5R

PRODUCT SERIES

The Ledlenser i-Series

Built for precision and professionalism

These Ledlensers stand out due to their yellow and black casings – and the bee-like colors are very fitting for the hard-working and persevering users of these lights. Developed especially for hard and demanding jobs, the lights in the i-Series are sturdy and functional companions. They have simple handling, the price is impressive and for rechargeable models they combine sustainability with power. There are therefore many reasons why this series is the first choice for countless tradespeople, electricians and industrial workers.

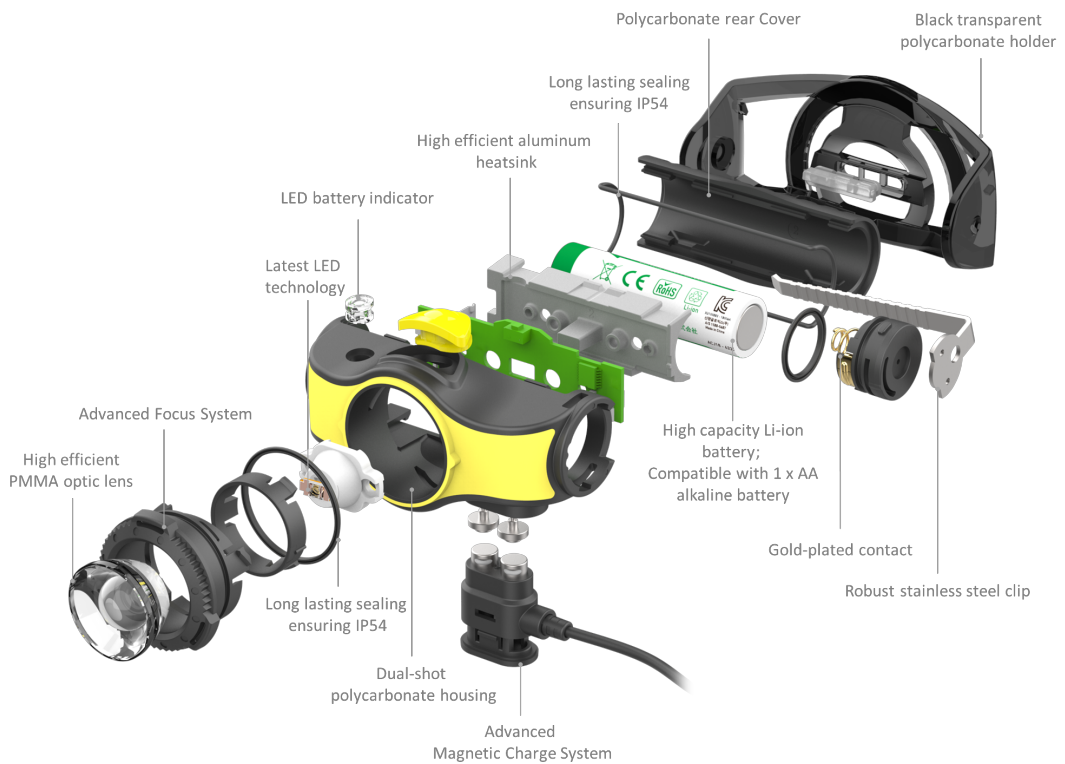

iH5R

FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".

2) Calculated capacity value in watt-hours (Wh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.

3) EP Patent 1880139, US Patent 7,461,960

4) Warranty period of five years from the date of purchase, seven years if the product is registered online on our website. The warranty is valid worldwide and legal warranty rights also apply. It covers defects in materials and workmanship. For the proper functioning of rechargeable batteries a different warranty period of 24 months applies. Excluded from this warranty are the product series "Solidline", Ledlenser K1 and Ledlenser K2. The warranty does not apply to Defects in batteries, holsters, pouches, remote switches, color filters, imprints or surface coatings. The guarantor is Ledlenser GmbH & Co. KG, Kronenstr. 5 - 7, 42699 Solingen, Germany. More information: ledlenser.com/warranty

5) Charging time varies by hardware used.