


Line

LED



Line is versatile and stylish LED-luminaire which suites all around buildings, but feels like home in warehouses, corridors or server rooms. Affordable Line is fast and easy to install and it will ensure freedom of maintenance for years.

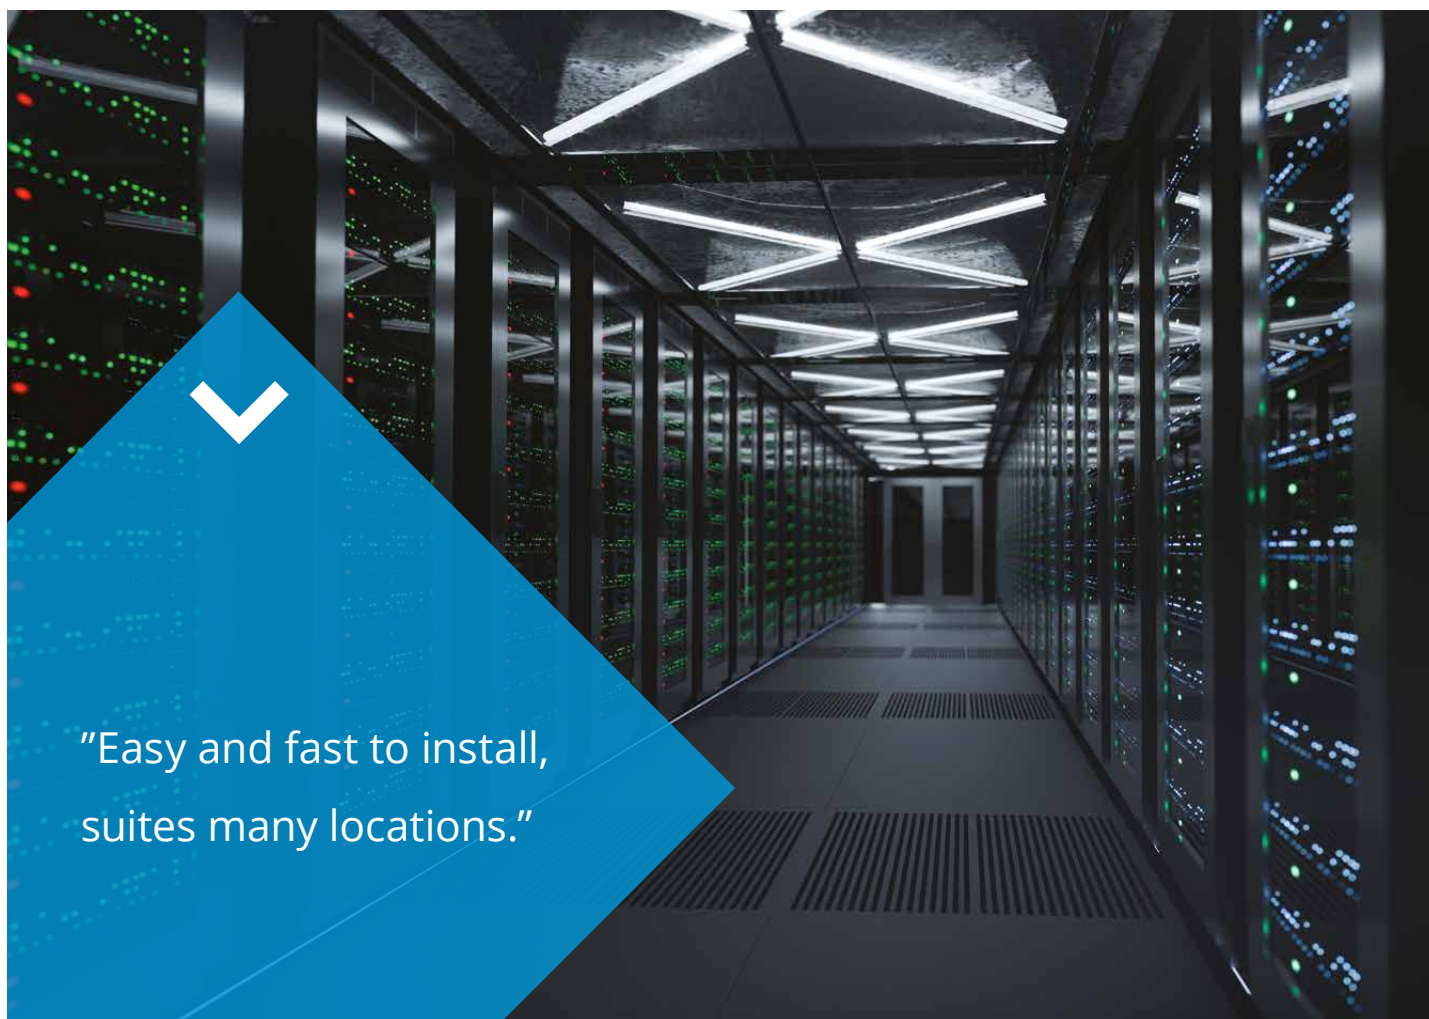

“Easy and fast to install,
suites many locations.”



Structure


- Body and diffuser polycarbonate
- Led not changeable
- IP66, IK08
- 4000 K, Ra>80
- Ambient temperature -30 °C – +50 °C
- LED-module lifespan 50 000 h (L80), T_a=25 °C

Control


- On/off

Mounting

- To the ceiling or lighting suspension rail with fast brackets
- Through-wired, cable entries at the both ends of the luminaire

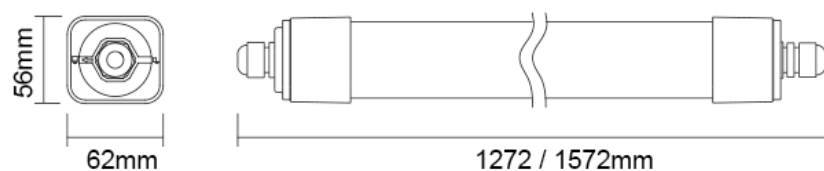

Luminaires per miniature circuit breaker	B10	B16	C10	C16
LI12.4300	11	18	18	30
LI15.6500	11	18	18	30

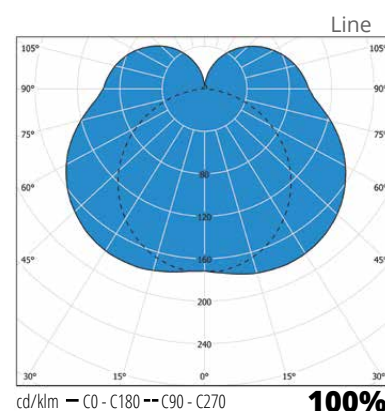

E number	Type	Product name	Output	Kg	Length	Width	Height	Luminous flux
Line								
43 611 81	LI12.4300	LI12.4300 IP66 36W 840 PC O	36W	1,0	1272	62	56	4300 lm
43 611 82	LI15.6500	LI15.6500 IP66 53W 840 PC O	53W	1,1	1572	62	56	6500 lm

