
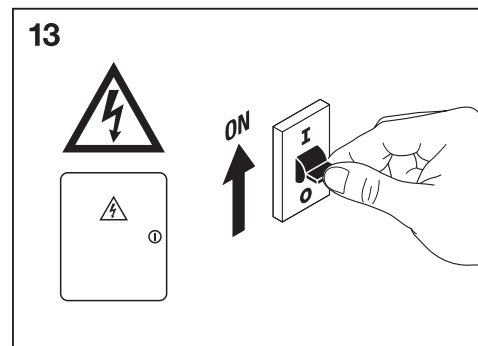
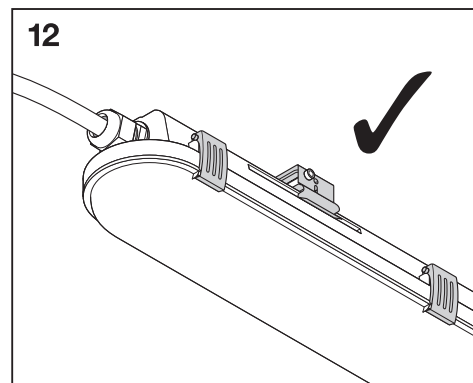
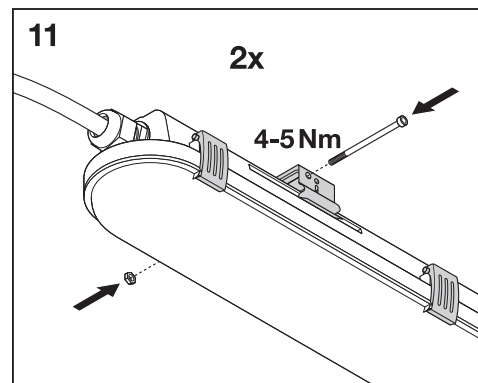
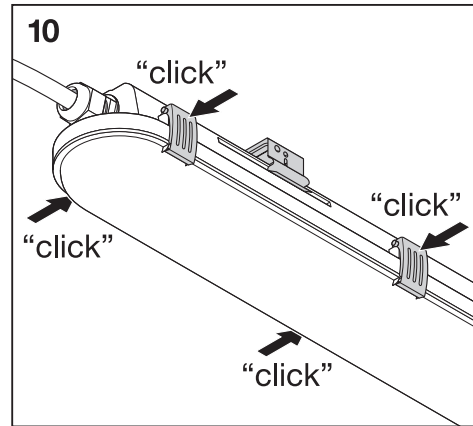
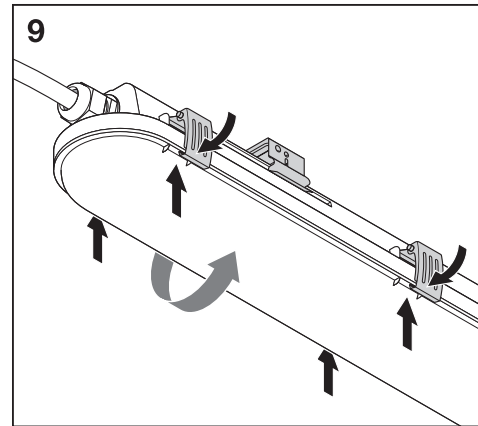


DAMPPROOF IP65

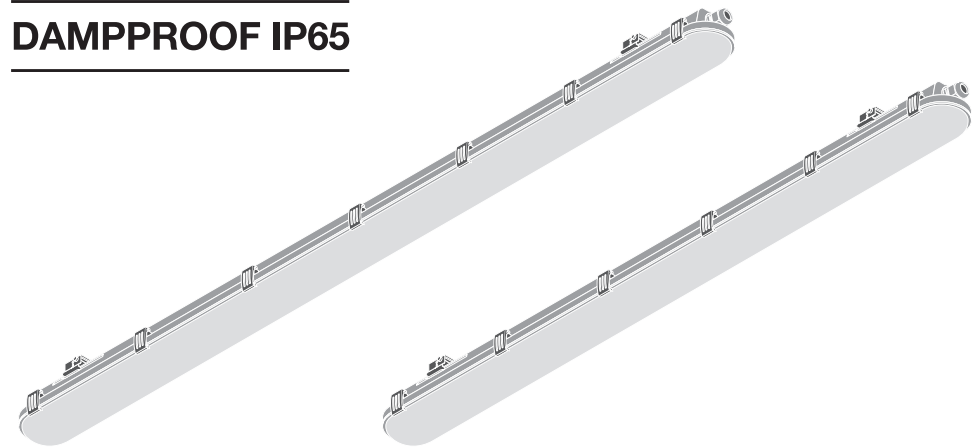

n	B16	C10	C16
DP 1200 18W	58	46	73
DP 1200 32W	27	24	39
DP 1500 26W	56	44	71
DP 1500 46W	26	23	37
DP 1500 58W	26	23	38
DP 1500 81W	13	16	26

	EAN	l x w x h [mm]	W	V _{AC}	Hz	lm	lm/W
DP 1200 18W 840 IP65 GY	4058075541047	1200 x 82 x 68	18	220-240V	50/60 Hz	2400	135
DP 1200 18W 865 IP65 GY	4058075541061	1200 x 82 x 68	18	220-240V	50/60 Hz	2400	135
DP 1200 32W 830 IP65 GY	4058075541085	1200 x 82 x 68	32	220-240V	50/60 Hz	4000	125
DP 1200 32W 840 IP65 GY	4058075541108	1200 x 82 x 68	32	220-240V	50/60 Hz	4400	135
DP 1200 32W 865 IP65 GY	4058075541122	1200 x 82 x 68	32	220-240V	50/60 Hz	4400	135
DP 1500 26W 840 IP65 GY	4058075541146	1500 x 82 x 68	26	220-240V	50/60 Hz	3500	135
DP 1500 26W 865 IP65 GY	4058075541160	1500 x 82 x 68	26	220-240V	50/60 Hz	3500	135
DP 1500 46W 830 IP65 GY	4058075541184	1500 x 82 x 68	46	220-240V	50/60 Hz	5750	125
DP 1500 46W 840 IP65 GY	4058075541207	1500 x 82 x 68	46	220-240V	50/60 Hz	6400	135
DP 1500 46W 865 IP65 GY	4058075541221	1500 x 82 x 68	46	220-240V	50/60 Hz	6400	135
DP 1500 58W 840 IP65 GY	4058075541245	1500 x 82 x 68	58	220-240V	50/60 Hz	8000	135
DP 1500 58W 865 IP65 GY	4058075541269	1500 x 82 x 68	58	220-240V	50/60 Hz	8000	135
DP 1500 81W 840 IP65 GY	4058075541283	1500 x 82 x 68	81	220-240V	50/60 Hz	11000	135
DP 1500 81W 865 IP65 GY	4058075541306	1500 x 82 x 68	81	220-240V	50/60 Hz	11000	135

	EAN	K	IP	IK	∇	R _a	⊖ (°C)	PF	👤
DP 1200 18W 840 IP65 GY	4058075541047	4000	65	08	110°	> 80	-25...+40	> 0.9	1.3kg
DP 1200 18W 865 IP65 GY	4058075541061	6500	65	08	110°	> 80	-25...+40	> 0.9	1.3kg
DP 1200 32W 830 IP65 GY	4058075541085	3000	65	08	110°	> 80	-25...+40	> 0.9	1.4kg
DP 1200 32W 840 IP65 GY	4058075541108	4000	65	08	110°	> 80	-25...+40	> 0.9	1.4kg
DP 1200 32W 865 IP65 GY	4058075541122	6500	65	08	110°	> 80	-25...+40	> 0.9	1.4kg
DP 1500 26W 840 IP65 GY	4058075541146	4000	65	08	110°	> 80	-25...+40	> 0.9	1.6kg
DP 1500 26W 865 IP65 GY	4058075541160	6500	65	08	110°	> 80	-25...+40	> 0.9	1.6kg
DP 1500 46W 830 IP65 GY	4058075541184	3000	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 46W 840 IP65 GY	4058075541207	4000	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 46W 865 IP65 GY	4058075541221	6500	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 58W 840 IP65 GY	4058075541245	4000	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 58W 865 IP65 GY	4058075541269	6500	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 81W 840 IP65 GY	4058075541283	4000	65	08	110°	> 80	-25...+40	> 0.9	1.7kg
DP 1500 81W 865 IP65 GY	4058075541306	6500	65	08	110°	> 80	-25...+40	> 0.9	1.7kg





CE EAC RoHS



C10449057
G11108018
23.11.20







LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com

DAMPPROOF IP65

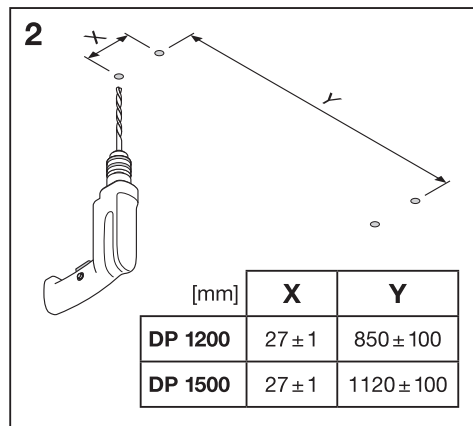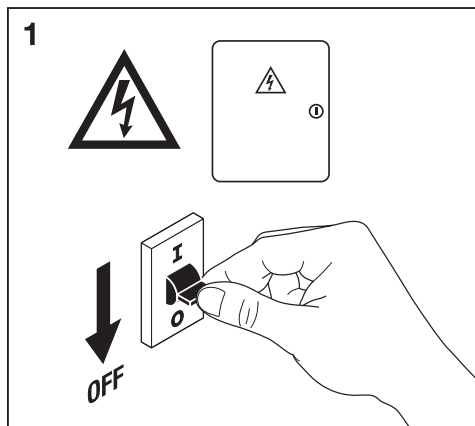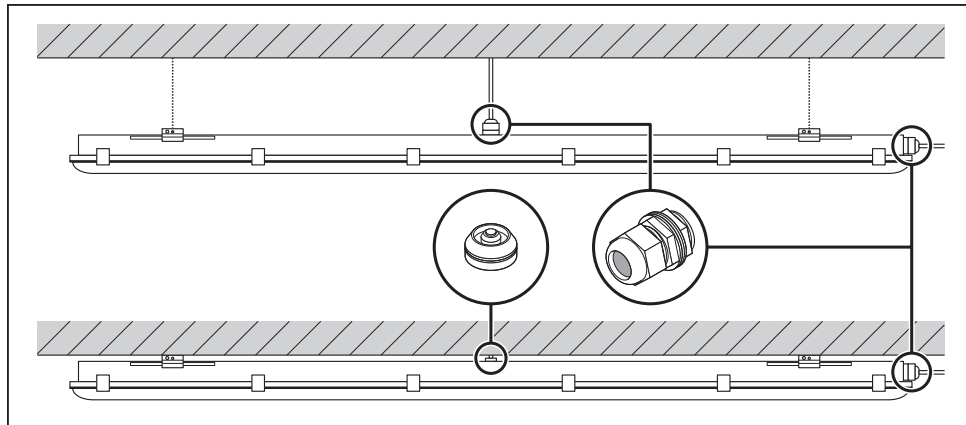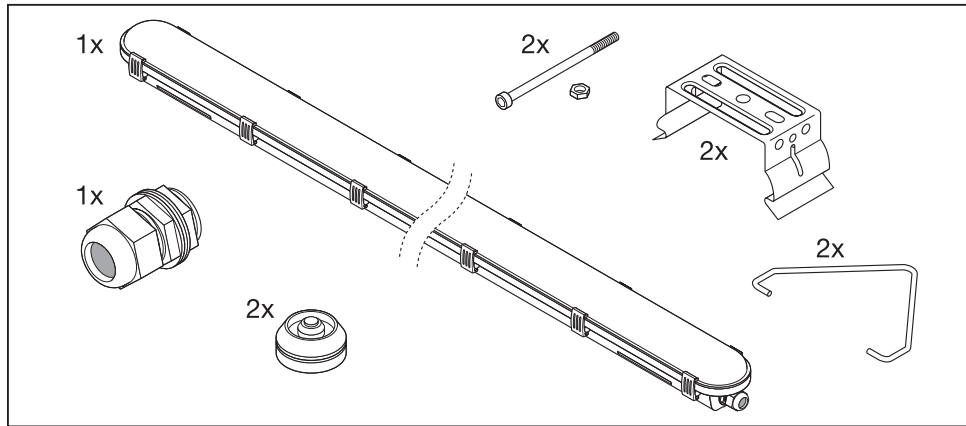

2

DAMPPROOF IP65

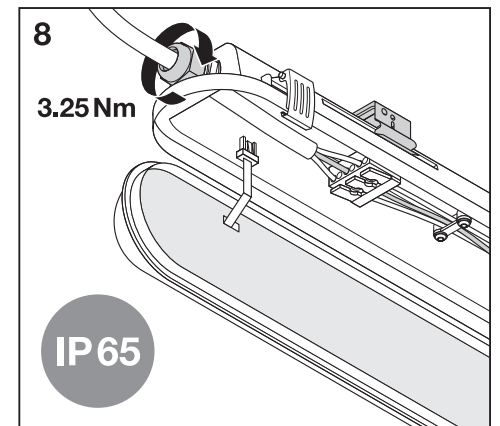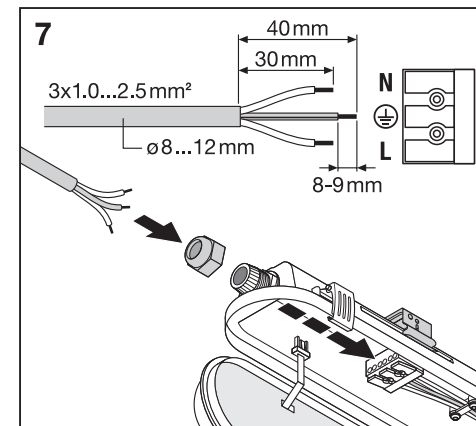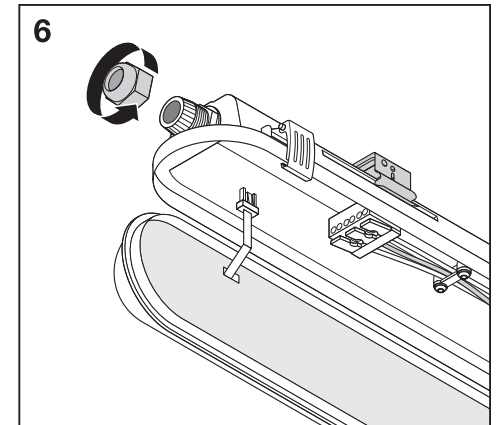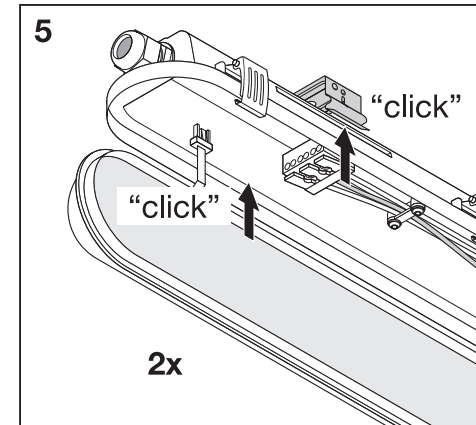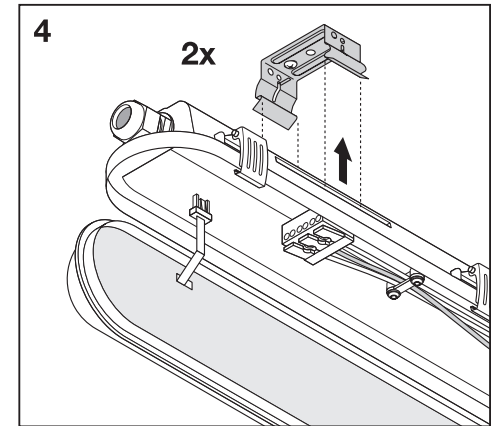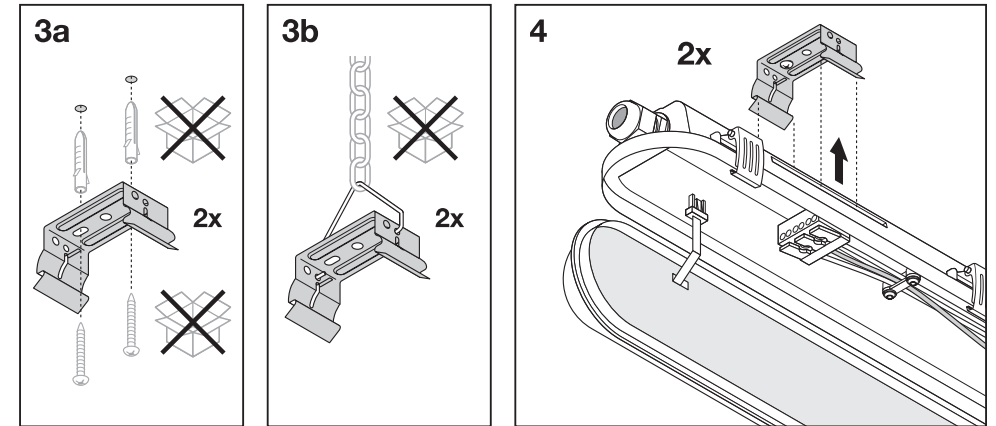

3