


EAN: 6414150072543

[www.oras.com/en/products/oras/product/7267](http://www.oras.com/en/products/oras/product/7267)

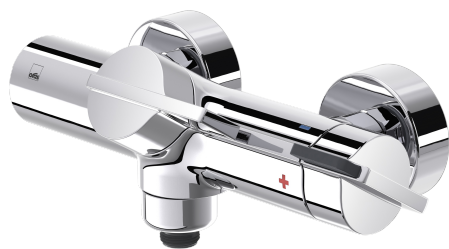

Pressure balancing shower faucet body with assist handles. Shower faucet that reacts quickly and precisely to the changes of water pressure and keeps the water temperature as selected. Suited to places where there are several water outlets and the network always contains plenty of hot water. The temperature adjustment knob is equipped with a temperature limiter which can be bypassed by pushing a button. The faucet includes litter filters and non-return valves.

- Health & Care
- Pressostatic
- Wall mounted
- Chrome
- Assist handle
- Limitation option for maximum temperature
- Non-return valve(s), Litter filter(s), Pressostatic cartridge that reacts quickly and precisely to changes in water pressure

## Technical data

### Flow properties

Flow-rate at 300 kPa	<b>0.23 l/s</b>
Pressure loss with flow (0.2 l/s)	<b>220 kPa</b>

### Technical properties




Hot water supply	<b>max. +80°C</b>
Working pressure	<b>150 - 1000 kPa</b>
Connection size	<b>G1/2</b>
Installation width	<b>CC150± 3 mm</b>
Material	<b>brass</b>

### Regulations

EN standard	<b>EN 1111</b>
Noise class	<b>II (ISO 3822)</b>


### Type approvals

STF certificate	<b>STF VTT-RTH-00028-11</b>
Sintef	<b>Sintef Nr. 0280</b>

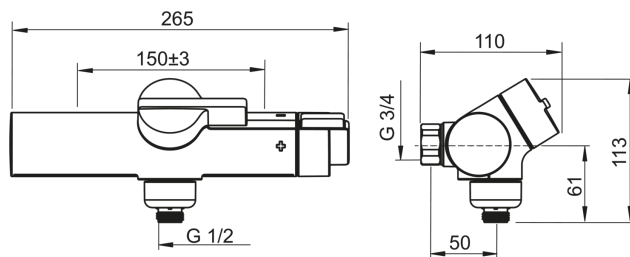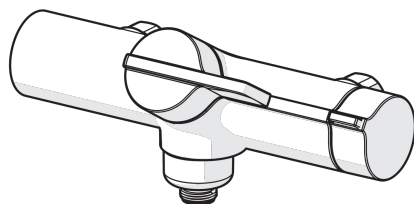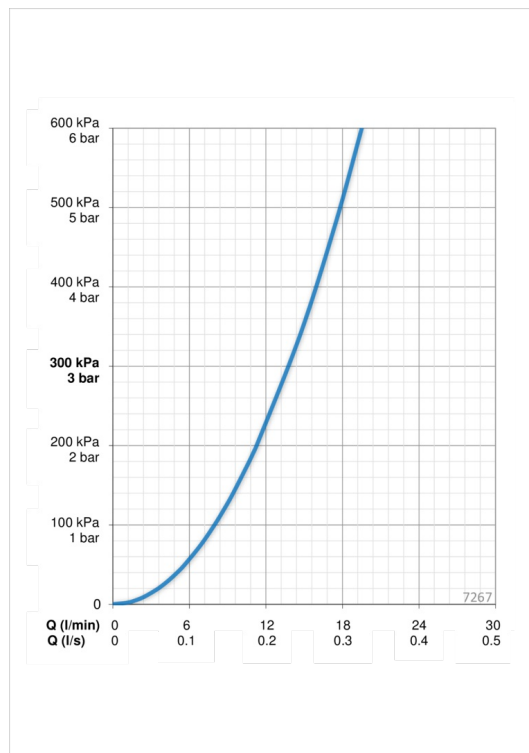

## Spare parts

---

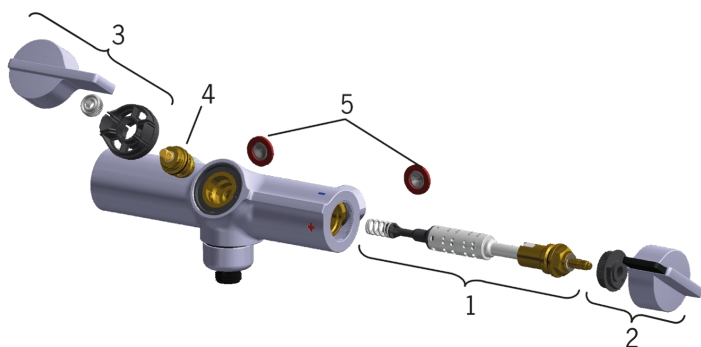

### SP7267

---

	Code
01	169940V
02	201044
03	201043
04	109390
05	198292/2