

# PRODUCT DATASHEET

## ENDURA BEAM Wall down GU10

ENDURA BEAM | GU10 socketed luminaires with classic shape and light outlet up and down



---

### AREAS OF APPLICATION

- Building facades
- Entrance lighting
- Patios, balconies
- Pathway lighting
- Driveways

---

### PRODUCT BENEFITS

- High flexibility in the choice of the light source thanks to GU10 base
- Easy and quick installation

---

### PRODUCT FEATURES

- Indirect illumination
- Housing material: aluminum
- Housing color: RAL 7016
- Type of protection: IP44



## TECHNICAL DATA


### Electrical data

Operating mode	Mains voltage
Nominal voltage	220...240 V
Mains frequency	50/60 Hz

### Luminaire control gear data

ECG - Dimmable	No
----------------	----

### Dimensions & weight

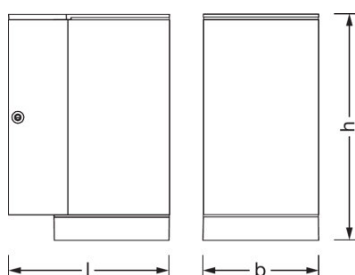

Length	104.0 mm
Width	92.0 mm
Height	146.0 mm
Product weight	601.00 g

### Colors & materials

Body material	Aluminum
Product color	Dark gray
Housing color	Dark gray
Cover material	Glass

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
---------------------------	--------------

### Additional product data

Mounting type	Surface
Mounting location	Wall
Product remark	Maximum bulb wattage: 35 W

### Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Terminal, 3-Pole (L, N, PE)
<b>Holder designation</b>	GU10

#### Certificates & standards

<b>Protection class</b>	I
<b>Type of protection</b>	IP44
<b>Standards</b>	CE/EAC/RoHS/REACH

#### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

#### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075554535	Folding carton box 1	100 mm x 110 mm x 155 mm	653.00 g	1.71 dm <sup>3</sup>
4058075554542	Shipping carton box 4	245 mm x 220 mm x 180 mm	2914.00 g	9.70 dm <sup>3</sup>

- The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.